
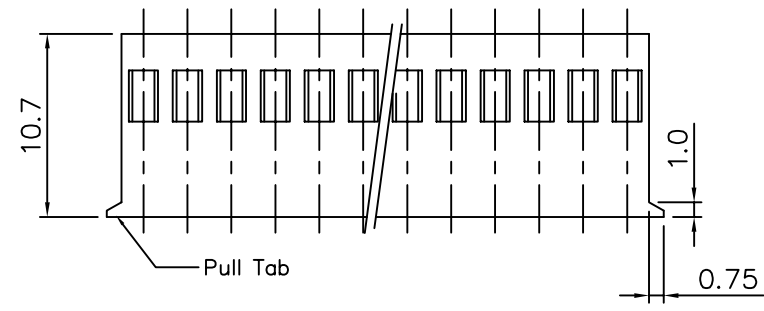


**SPECIFICATIONS**

Current Rating: 3 Amperes  
 Voltage Rating: 250V AC, DC  
 Dielectric Withstanding Voltage:  
     1500 AC For 60 Seconds  
 Contact Resistance: 20 Milliohms Max  
 Insulation Resistance: 1000 Megohms Min  
 Ambient Temperature Range: -40°C To +105°C  
 Material: Nylon 66, UL 94V-0

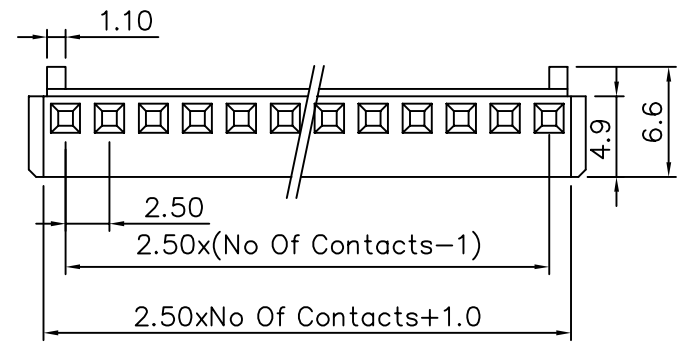

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 01763

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm



AREA	REVISIONS	CHK	DATE