

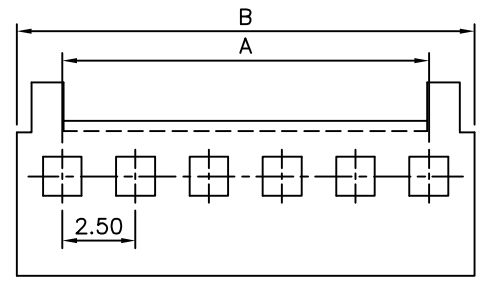




△ SPECIFICATION
 Electrical Rating:UL 250V 1A,AC/DC
 CSA 250V 1A,AC/DC
 Material:PA66(UL94V-0)
 RoHS Compliant

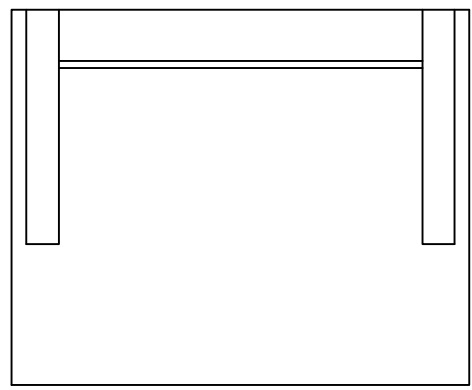

△

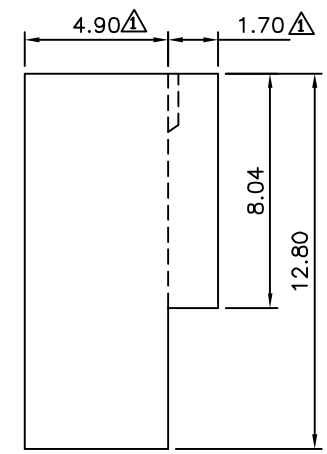

△

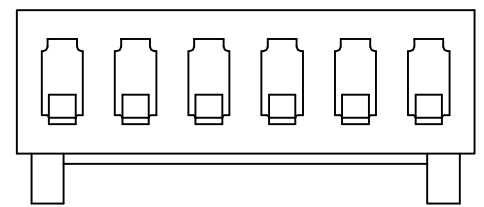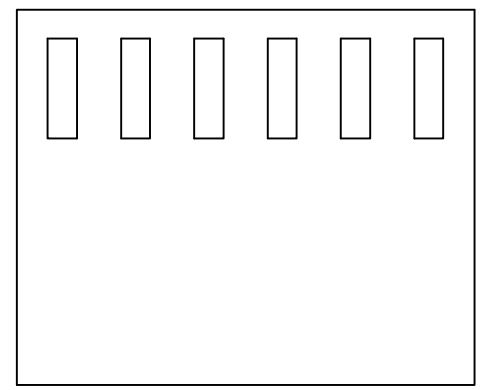

△

△

Pin	A	B	Pin	A	B
2	2.50	5.60	14	32.50	35.60
3	5.00	8.10	15	35.00	38.10
4	7.50	10.60	16	37.50	40.60
5	10.00	13.10	17	40.00	43.10
6	12.50	15.60	18	42.50	45.60
7	15.00	18.10	19	45.00	48.10
8	17.50	20.60	20	47.50	50.60
9	20.00	23.10	21	50.00	53.10
10	22.50	25.60	22	52.50	55.60
11	25.00	28.10	23	55.00	58.10
12	27.50	30.60	24	57.50	60.60
13	30.00	33.10	25	60.00	63.10

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 △.XX ±0.20 .XXX ±0.10 ANG. ±2°
01880		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		WSS		
SCALE	NONE	REV.	A1	⊕

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/25/2011
△ A0		NEW RELEASE		