

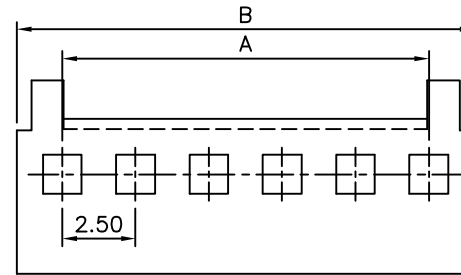


△ SPECIFICATION


Electrical Rating:UL 250V 1A,AC/DC
CSA 250V 1A,AC/DC
Material:PA66(UL94V-0)
RoHS Compliant

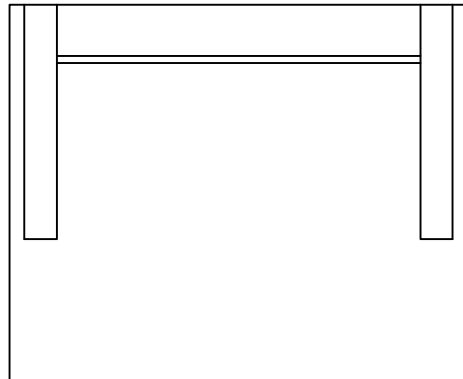

△

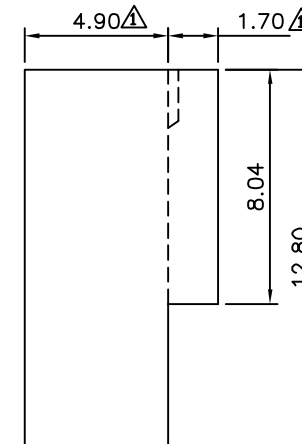

△

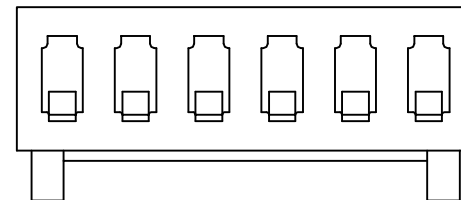

△

△

Pin	A	B	Pin	A	B
2	2.50	5.60	14	32.50	35.60
3	5.00	8.10	15	35.00	38.10
4	7.50	10.60	16	37.50	40.60
5	10.00	13.10	17	40.00	43.10
6	12.50	15.60	18	42.50	45.60
7	15.00	18.10	19	45.00	48.10
8	17.50	20.60	20	47.50	50.60
9	20.00	23.10	21	50.00	53.10
10	22.50	25.60	22	52.50	55.60
11	25.00	28.10	23	55.00	58.10
12	27.50	30.60	24	57.50	60.60
13	30.00	33.10	25	60.00	63.10

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01882

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

WSS

UNLESS OTHERWISE
SPECIFIED

.X ± 0.30
△ .XX ± 0.20
.XXX ± 0.10
ANG. $\pm 2^\circ$

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	10/25/2011	
△ A0	NEW RELEASE			