

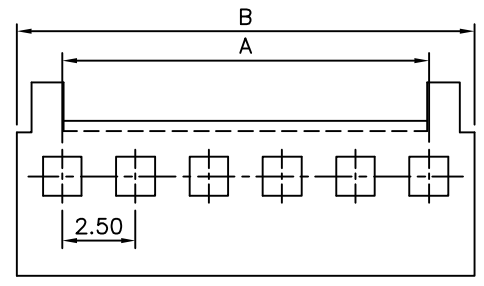




**△ SPECIFICATION**  
 Electrical Rating:UL 250V 1A,AC/DC  
 CSA 250V 1A,AC/DC  
 Material:PA66(UL94V-0)  
 RoHS Compliant

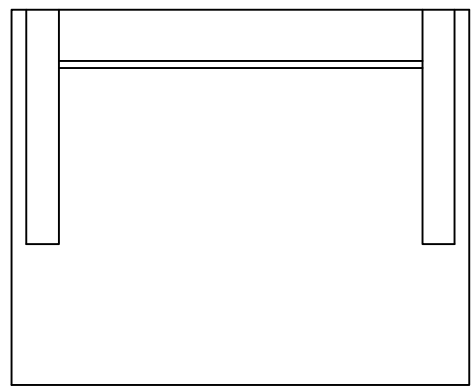

△

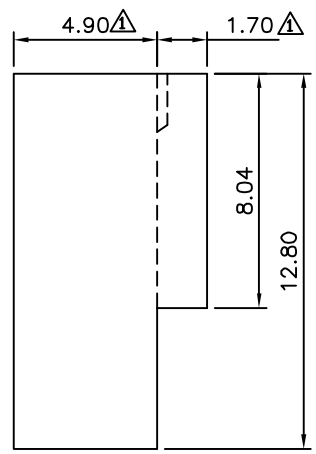

△

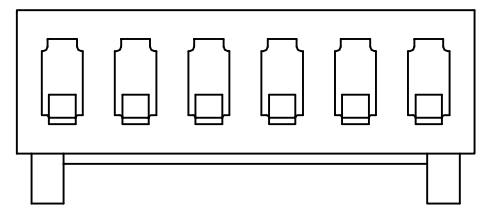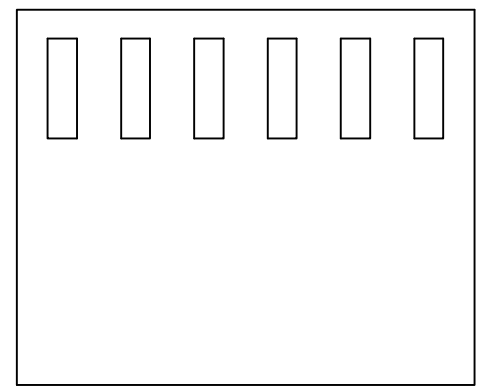

△

△

Pin	A	B	Pin	A	B
2	2.50	5.60	14	32.50	35.60
3	5.00	8.10	15	35.00	38.10
4	7.50	10.60	16	37.50	40.60
5	10.00	13.10	17	40.00	43.10
6	12.50	15.60	18	42.50	45.60
7	15.00	18.10	19	45.00	48.10
8	17.50	20.60	20	47.50	50.60
9	20.00	23.10	21	50.00	53.10
10	22.50	25.60	22	52.50	55.60
11	25.00	28.10	23	55.00	58.10
12	27.50	30.60	24	57.50	60.60
13	30.00	33.10	25	60.00	63.10

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 01884  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY WSS  
 SCALE NONE REV. A1  
 UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.30  
 .XX ±0.20  
 .XXX ±0.10  
 ANG. ±2°  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/25/2011
△ A0		NEW RELEASE		