
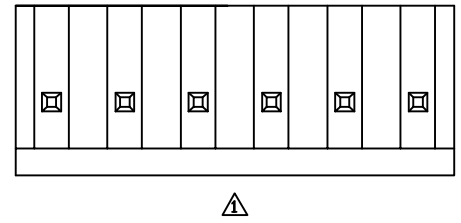
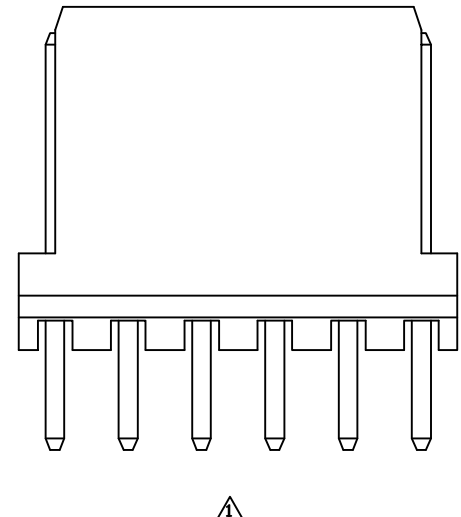
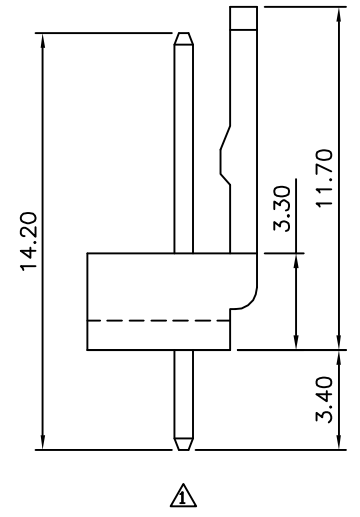


△ SPECIFICATION
 Electrical Rating:UL:250V 1A,AC/DC
 CSA:250V 1A,AC/DC
 Insulator:PA66(UL94V-2),White
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

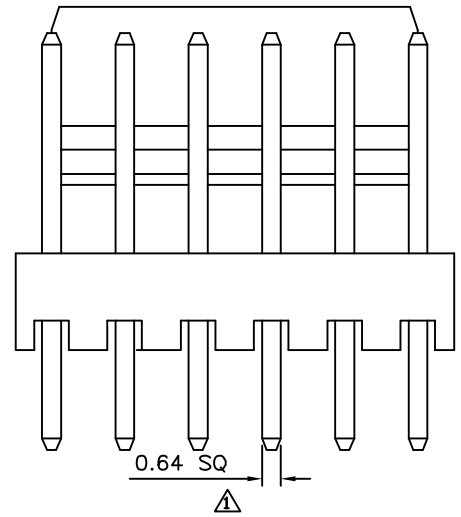

△

Pin	A	B	Pin	A	B
2	2.50	5.00	12	27.50	30.00
3	5.00	7.50	13	30.00	32.50
4	7.50	10.00	14	32.50	35.00
5	10.00	12.50	15	35.00	37.50
6	12.50	15.00	16	37.50	40.00
7	15.00	17.50	17	40.00	42.50
8	17.50	20.00	18	42.50	45.00
9	20.00	22.50	19	45.00	47.50
10	22.50	25.00	20	47.50	50.00
11	25.00	27.50			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 01892
 APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY GAO
 SCALE NONE REV. A2
 UNIT mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±2°

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Add P/N Code	HZF	02/20/2013
△ A1		Modify Data	HZF	03/14/2011
△ A0		NEW RELEASE	HZF	01/13/2010