

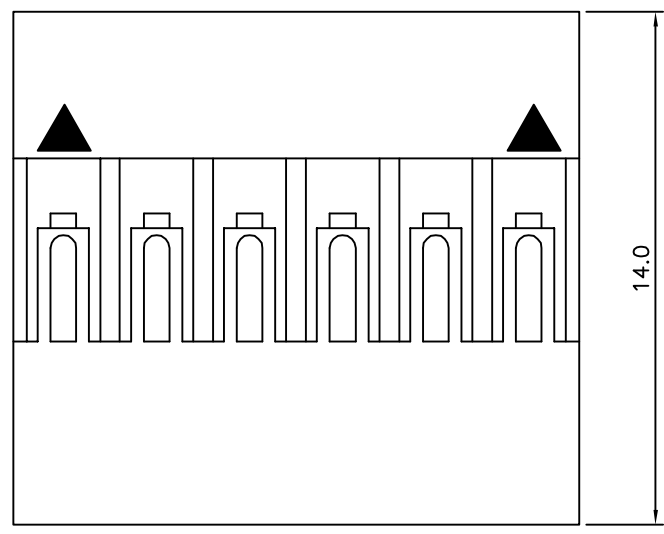


**SPECIFICATION**

Current Rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Temperature Range:-25°C~+85°C  
 Insulation Resistance:1000 Megaohms Min.  
 Withstand Voltage:800V AC/Minute  
 Material:Noryl(UL94V-1),Black  
 RoHS Compliant

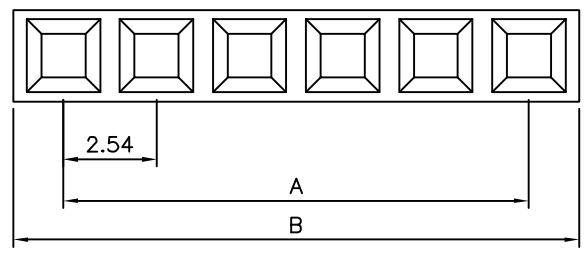

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
1	—	2.65	21	50.80	53.54
2	2.54	5.28	22	53.34	56.08
3	5.08	7.82	23	55.88	58.62
4	7.62	10.36	24	58.42	61.16
5	10.16	12.90	25	60.96	63.70
6	12.70	15.44	26	63.50	66.24
7	15.24	17.98	26	66.04	68.78
8	17.78	20.52	28	68.58	71.32
9	20.32	23.06	28	71.12	73.86
10	22.86	25.60	30	73.66	76.40
11	25.40	28.14	31	76.20	78.94
12	27.94	30.68	32	78.74	81.48
13	30.48	33.22	33	81.28	84.02
14	33.02	35.76	34	83.82	86.56
15	35.56	38.30	35	86.36	89.10
16	38.10	40.84	36	88.90	91.64
17	40.64	43.38	37	91.44	94.18
18	43.18	45.92	38	93.98	96.72
19	45.72	48.46	39	96.52	99.26
20	48.26	51.00	40	99.06	101.80

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 02057  
 APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO  
 SCALE NONE REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	08/27/2014
△2	A2	Modify Data	HZF	03/15/2010
△1	A1	Modify Data	BECKY	2005/04/19
△	A	NEW RELEASE	RAN	