

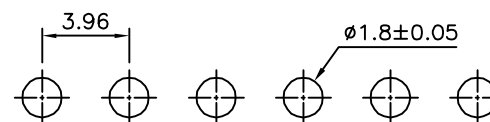
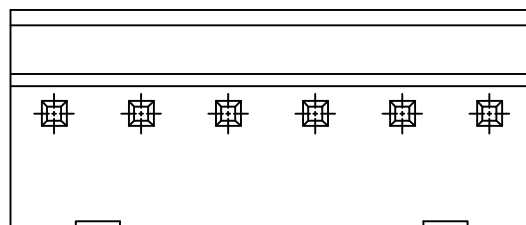


SPECIFICATION

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Operation Temperature:-25°C~+85°C
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Dielectric Withstanding Voltage:1500V AC/Minute
Insulator:PA66(UL94V-2),Nature
Contact:Brass,Tin Plated
RoHS Compliant

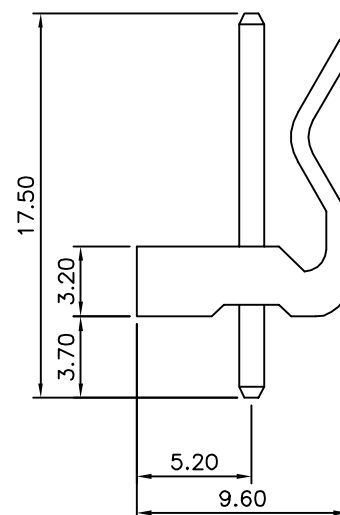

Recommended P.C.B. Layout

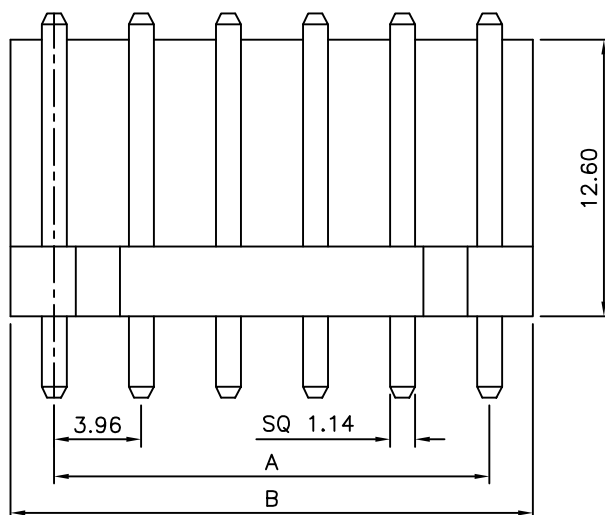

Pin	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.86
9	31.86	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02152

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

QQJ

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.50
.XX ±0.35
ANG.

SCALE

NONE

REV.

B1

UNIT
mm



NO.

REV.

B1 Modify Data

B0 NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

10/04/2013

10/16/2010