
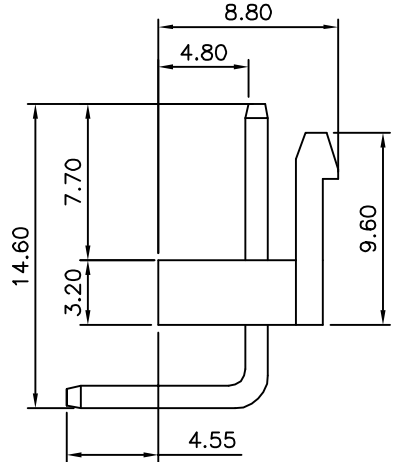
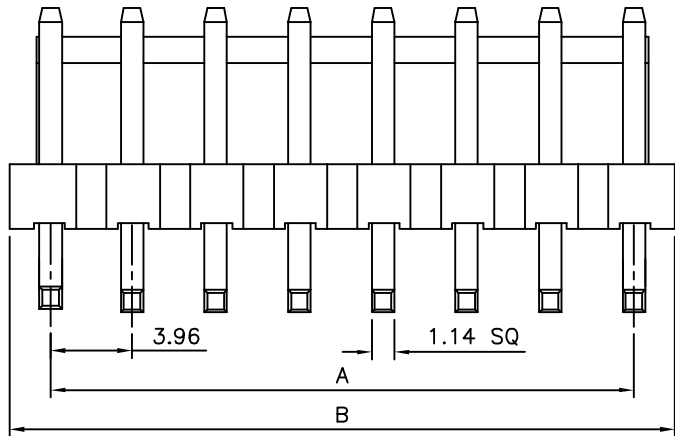


Recommended P.C.B. Layout(Component Side)

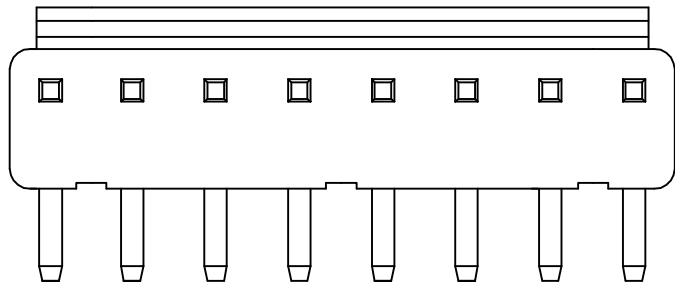

**SPECIFICATION**

Current Rating:5A AC,DC  
 Voltage Rating:250V AC Max.  
 Operation Temperature:-25°C~+85°C  
 Contact Resistance:10 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Dielectric Withstanding Voltage:1500V AC,DC Min.  
 Contact:Brass,Tin Plated  
 Insulator:PA66(UL94V-0)

Pin	A	B
02	3.96	7.92
03	7.92	11.92
04	11.88	15.84
05	15.84	19.84
06	19.80	23.80
07	23.76	27.88
08	27.72	31.74
09	31.68	35.86
10	35.64	39.90
11	39.60	43.84
12	43.56	47.92
13	47.52	51.72
14	51.48	55.92

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 02215

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY GAO  
 REV. B1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.5  
 .XX ±0.25  
 ANG.  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B1	Modify Data	HZF	11/15/2012
△	B0	NEW RELEASE	BECKY	02/08/2006

SCALE NONE