
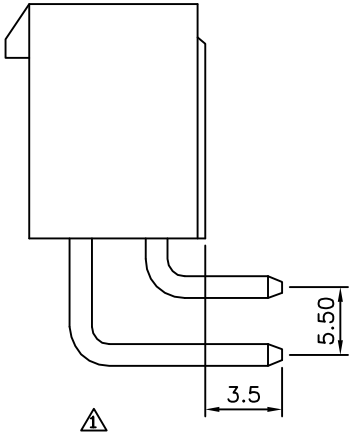
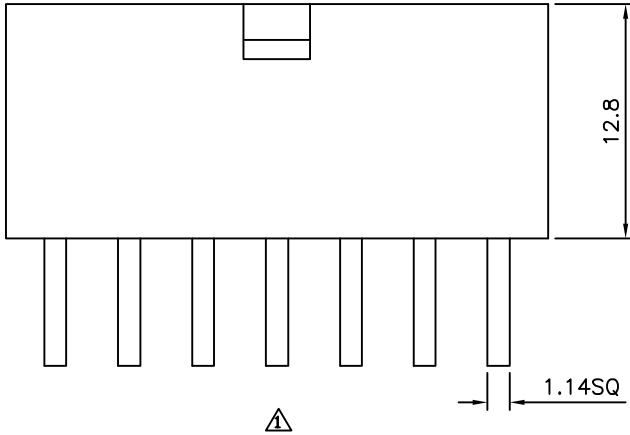


△ SPECIFICATION
Current Rating:8A AC/DC
Voltage Rating:500V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-2),Nature
Contact:Brass,Tin Plated
Applicable PC Board Thickness:1.6mm
RoHS Compliant

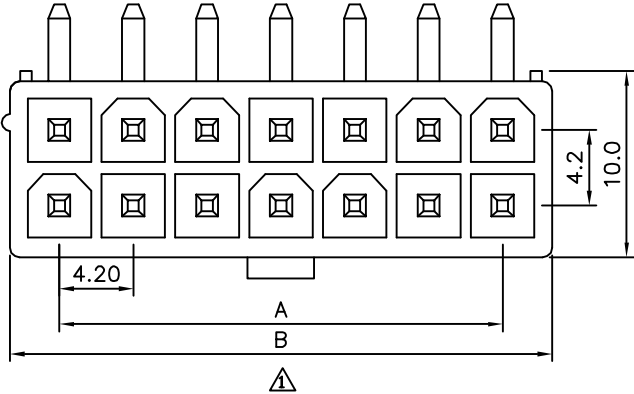

△ Pin	A	B
02		5.2
04	4.20	9.4
06	8.40	13.6
08	12.60	17.8
10	16.80	22.0
12	21.00	26.2
14	25.20	30.4
16	29.40	34.6
18	33.60	38.8
20	37.80	43.0
22	42.00	47.2
24	46.20	51.4

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
02280

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
HAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.5
X ±0.25
.XX ±0.2
.XXX ±0.08

NO.	REV.	REVISIONS	CHK	DATE
△ A1	Modify Data	HZF	11/25/2014	
△ A0	NEW RELEASE			

SCALE NONE

REV. A1

UNIT mm