



△ SPECIFICATION


Current Rating:5A AC/DC
Voltage Raing:300V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+90°C
Material:PA66(UL94V-2)
RoHS Compliant

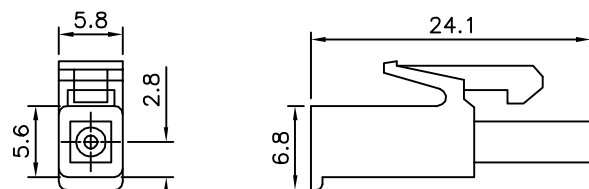


△ 02301

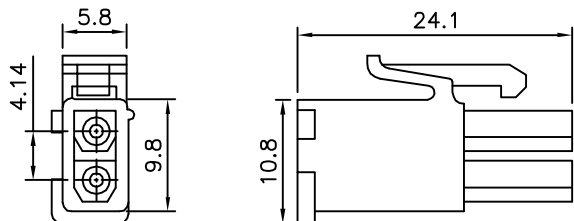


△ 02302

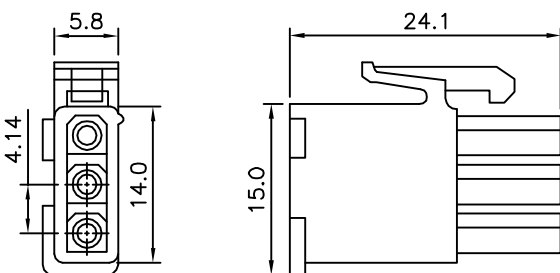



△ 02303

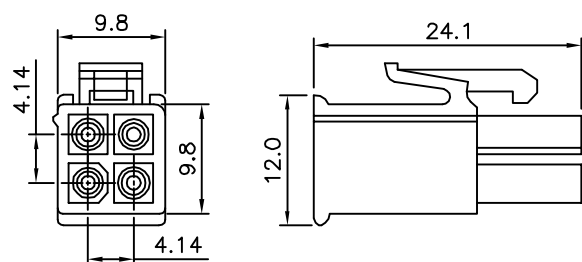



△ 02306





△ 02307




△ 02309



△ 02308



△ 02305



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02305

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.3
.XX ±0.3
ANG.

UNIT
mm



⚠	A3	Modify Data	HZF	09/13/2012
⚠	A2	Modify Data	HZF	07/01/2011
⚠	A1	Modify Data	HZF	11/11/2008
⚠	A0	NEW RELEASE		
NO	REV	REVISIONS	CHK	DATE