

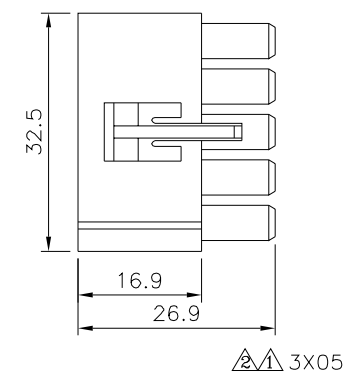





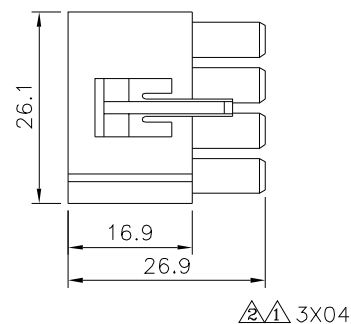

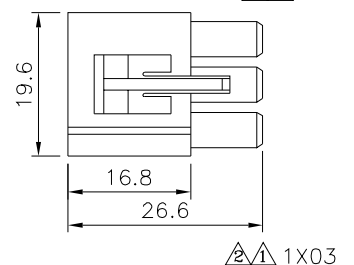



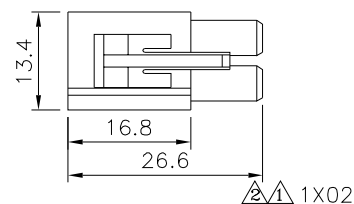

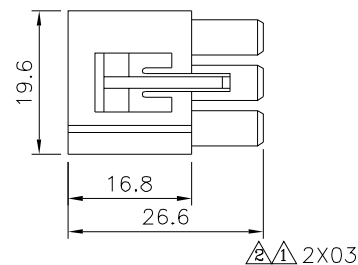



SPECIFICATION

Current Rating:12A AC/DC
Voltage Rating:300V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+90°C
Material:PA66(UL94V-2)
RoHS Compliant



4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02439

APPROVED BY
EMILY

CHECKED BY
HZF

DRAWING BY
SONG

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.3

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	05/05/2014
△	A1	Modify Data	HZF	03/15/2011
△	A0	NEW RELEASE	BECKY	09/16/2005