
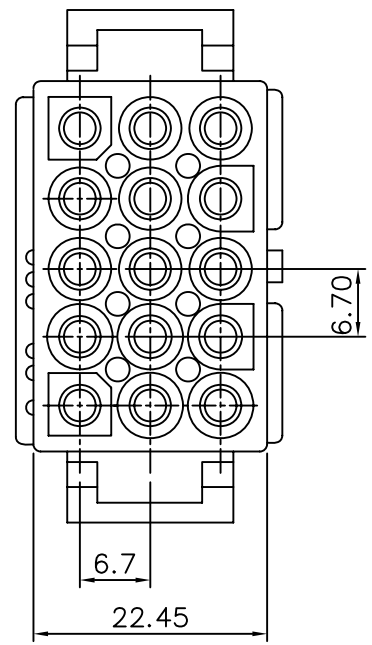


△ SPECIFICATIONS
 Voltage Rating:300V AC,DC
 Current Rating:12A AC,DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megohms Min.
 Temperature Range:-25°C To +85°C
 Material:UL 94V-2,Nylon 66

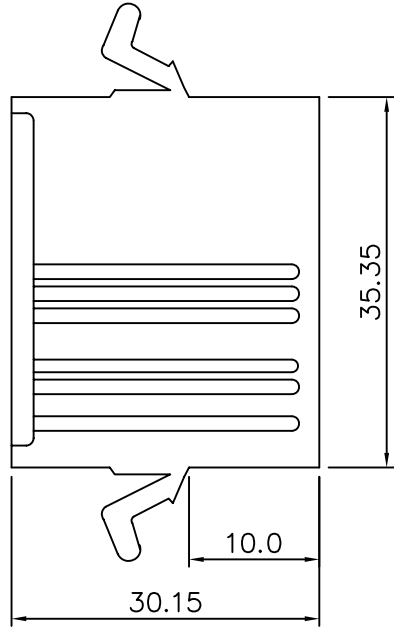

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

| | | | | |
|-------------|------|---------------------|----|--|
| DRAWING No. | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 AWG. |
| 02459 | | MEI | | |
| | | CHECKED BY BECKY | | |
| | | DRAWING BY LXH | | |
| SCALE | NONE | REV. | A1 | UNIT mm |

| | | | | |
|------|------|-------------|-------|------------|
| NO. | REV. | REVISIONS | CHK | DATE |
| △ A1 | | Add Spec. | BECKY | 07/15/2005 |
| △ A | | NEW RELEASE | RAN | |