File No.	7C3E-JS-1123-XX	SHEET	1 / 1

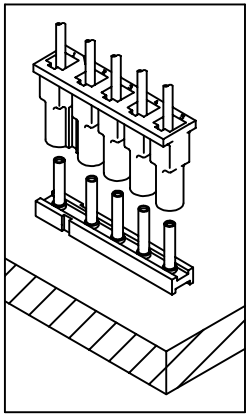

SPECIFICATIONS

Current Rating: 7A AC, DC
Voltage Rating: 250V AC, DC
Withstanding Voltage: 1500V AC/Minute
Contact Resistance: Initial Value/10mΩ max.
After Environmental Testing/20mΩ max.
Insulation Resistance: 1000MΩ Min.
Temperature Range: −25℃ To +85℃
Applicable PC Board Thickness: 1.6mm
Material: Nylon 66,UL 94V−0 Or 94V−2

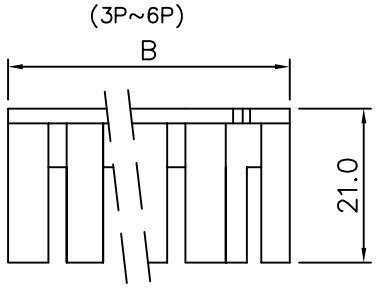

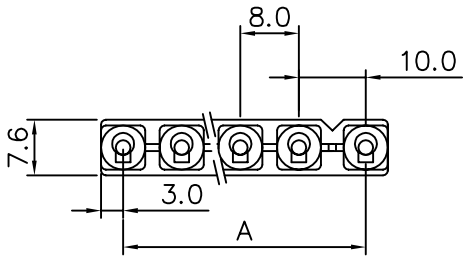

Position	A	B
03	18.0	24.0
04	26.0	32.0
05	34.0	40.0
06	42.0	48.0

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
02464	MEI	.X ±0.38
	CHECKED BY RAN	.XX ±0.25
	DRAWING BY HZF	ANG.
SCALE NONE	REV. A	UNIT mm

AREA	REVISIONS	CHK	DATE