
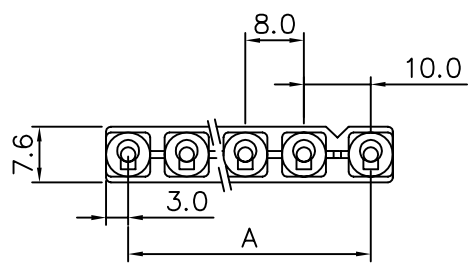
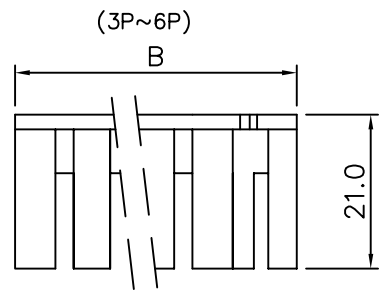


**SPECIFICATIONS**

Current Rating: 7A AC, DC  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 1500V AC/Minute  
 Contact Resistance: Initial Value/10mΩ max.  
 After Environmental Testing/20mΩ max.  
 Insulation Resistance: 1000MΩ Min.  
 Temperature Range: -25°C To +85°C  
 Applicable PC Board Thickness: 1.6mm  
 Material: Nylon 66, UL 94V-0 Or 94V-2

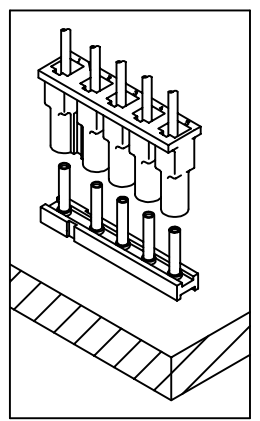

Position	A	B
03	18.0	24.0
04	26.0	32.0
05	34.0	40.0
06	42.0	48.0

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 02466		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
		CHECKED BY RAN		
		DRAWING BY HZF		
SCALE NONE	REV. A	UNIT mm		

AREA	REVISIONS	CHK	DATE
------	-----------	-----	------