
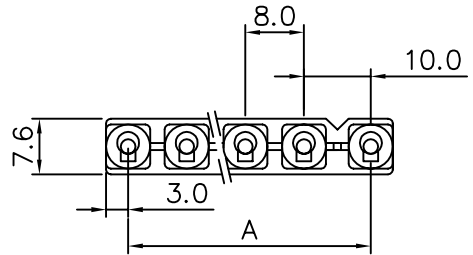
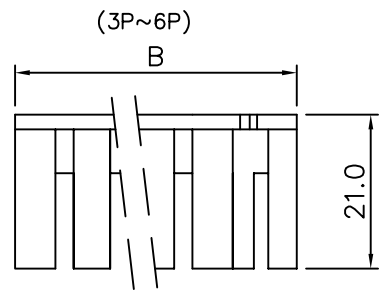


**SPECIFICATIONS**

Current Rating: 7A AC, DC  
 Voltage Rating: 250V AC, DC  
 Withstanding Voltage: 1500V AC/Minute  
 Contact Resistance: Initial Value/10mΩ max.  
 After Environmental Testing/20mΩ max.  
 Insulation Resistance: 1000MΩ Min.  
 Temperature Range: -25°C To +85°C  
 Applicable PC Board Thickness: 1.6mm  
 Material: Nylon 66, UL 94V-0 Or 94V-2

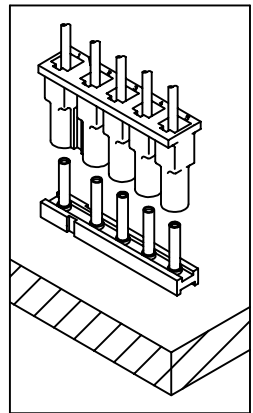

| Position | A    | B    |
|----------|------|------|
| 03       | 18.0 | 24.0 |
| 04       | 26.0 | 32.0 |
| 05       | 34.0 | 40.0 |
| 06       | 42.0 | 48.0 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  
 02467

APPROVED BY MEI  
 CHECKED BY RAN  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE

REV. A

UNIT mm

AREA REVISIONS CHK DATE