




**△ SPECIFICATION**  
 Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC,DC  
 Withstanding Voltage: 800V AC/Minute  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operating Temperature: -25°C~+85°C  
 Insulator: PA66(UL94V-0)  
 RoHS Compliant

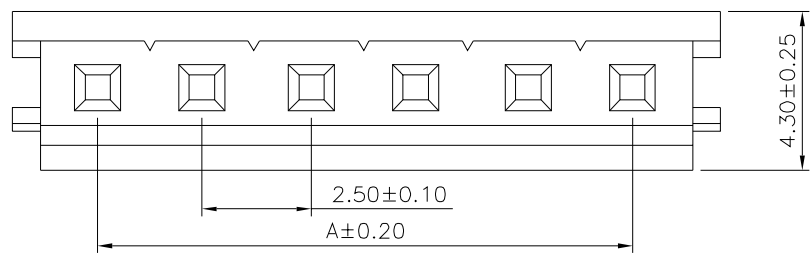

△

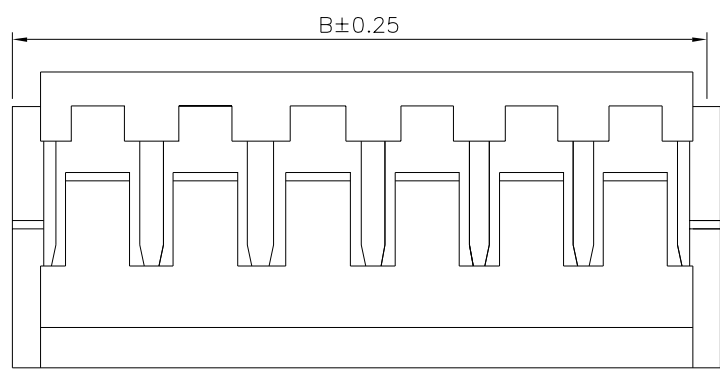

△

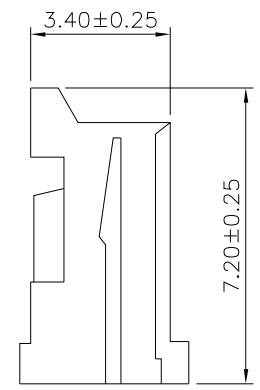

△

Pin	A	B
02	2.50	7.00
03	5.00	9.50
04	7.50	12.00
05	10.00	14.50
06	12.50	17.00
07	15.00	19.50
08	17.50	22.00
09	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 02550

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP  
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.3 △  
 .XX ±0.2 △

SCALE NONE

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	03/03/2016
△ A0		NEW RELEASE	HZF	