




△ SPECIFICATION
 Current Rating: 3A AC/DC
 Voltage Rating: 250V AC,DC
 Withstanding Voltage: 800V AC/Minute
 Contact Resistance: 10 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -25°C~+85°C
 Insulator: PA66(UL94V-0)
 RoHS Compliant

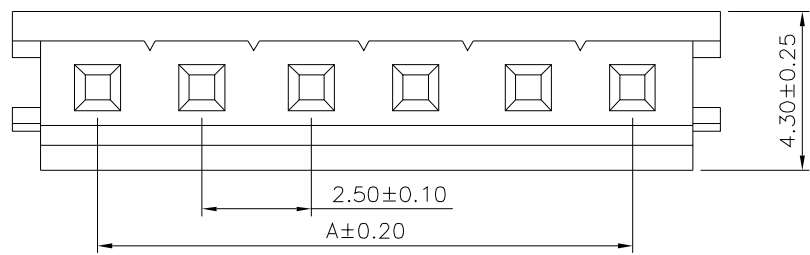

△

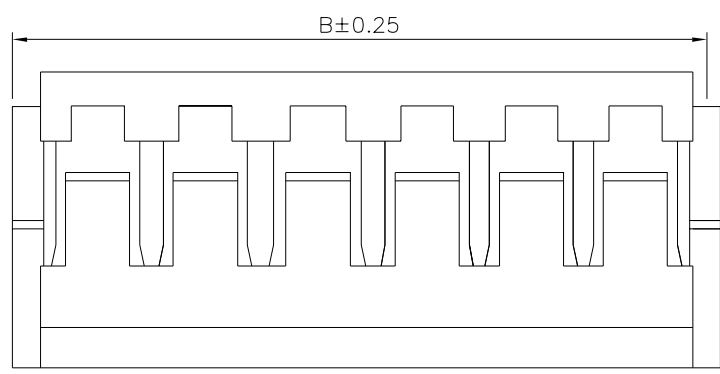

△

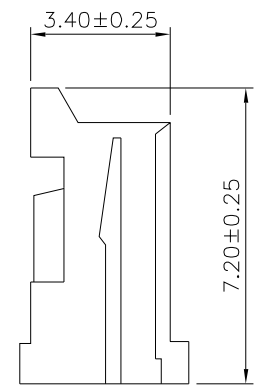

△

| Pin | A | B |
|-----|-------|-------|
| 02 | 2.50 | 7.00 |
| 03 | 5.00 | 9.50 |
| 04 | 7.50 | 12.00 |
| 05 | 10.00 | 14.50 |
| 06 | 12.50 | 17.00 |
| 07 | 15.00 | 19.50 |
| 08 | 17.50 | 22.00 |
| 09 | 20.00 | 24.50 |
| 10 | 22.50 | 27.00 |
| 11 | 25.00 | 29.50 |
| 12 | 27.50 | 32.00 |

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
 02551
 SCALE NONE

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP
 REV. A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.3 △
 .XX ±0.2 △
 UNIT mm

| NO. | REV. | REVISIONS | CHK | DATE |
|------|------|-------------|-----|------------|
| △ A1 | | Modify Data | HZF | 03/03/2016 |
| △ A0 | | NEW RELEASE | HZF | |