




**△ SPECIFICATION**  
 Current Rating: 3A AC/DC  
 Voltage Rating: 250V AC,DC  
 Withstanding Voltage: 800V AC/Minute  
 Contact Resistance: 10 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operating Temperature: -25°C~+85°C  
 Insulator: PA66(UL94V-0)  
 RoHS Compliant

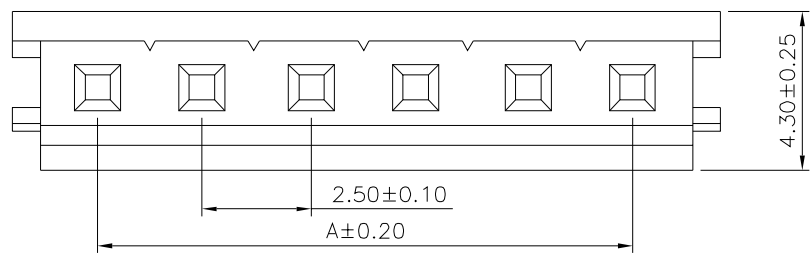

△

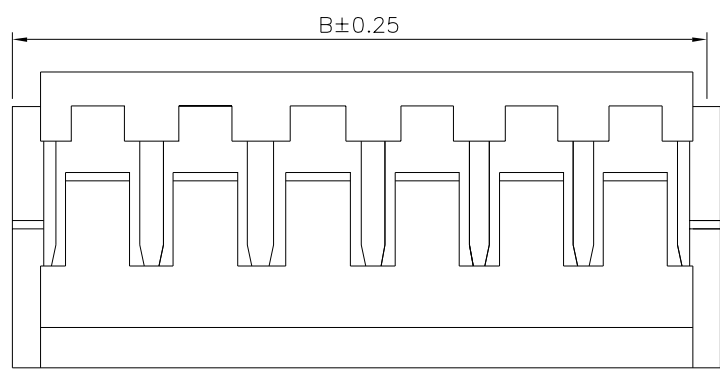

△

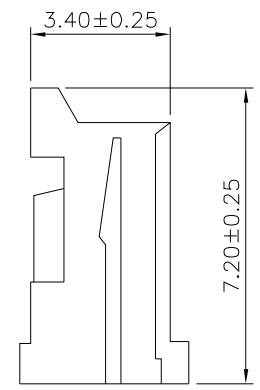

△

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 2.50  | 7.00  |
| 03  | 5.00  | 9.50  |
| 04  | 7.50  | 12.00 |
| 05  | 10.00 | 14.50 |
| 06  | 12.50 | 17.00 |
| 07  | 15.00 | 19.50 |
| 08  | 17.50 | 22.00 |
| 09  | 20.00 | 24.50 |
| 10  | 22.50 | 27.00 |
| 11  | 25.00 | 29.50 |
| 12  | 27.50 | 32.00 |

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △  
 02558

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.3 △  
 .XX ±0.2 △

SCALE NONE REV. A1

UNIT mm

| NO.  | REV. | REVISIONS   | CHK | DATE       |
|------|------|-------------|-----|------------|
| △ A1 |      | Modify Data | HZF | 03/03/2016 |
| △ A0 |      | NEW RELEASE | HZF |            |