





Recommended P.C.B. Layout For 15 Pin

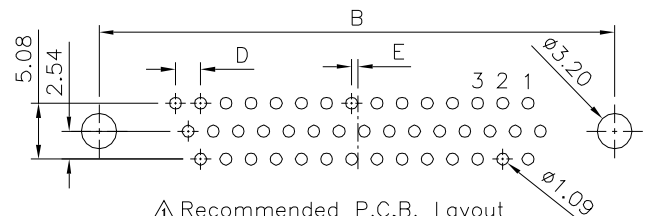


Recommended P.C.B. Layout For 26,44,62 Pin

**SPECIFICATION**


Current Rating:1 Amps  
 Withstanding Voltage:500V For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 At 500V DC  
 Operating Temperature:-40°C~+85°C  
 Insulator:PBT+30%G.F.(UL94V-0),Black  
 Contact:C2680  
 Gold Flash On Contact Area,Tin Plated  
 On Solder Tails,Over Nickel  
 Shell:SPCC,Nickel Plated  
 Boardlock:SPCC,Tin Plated  
 Rivet:C3604,Nickel Plated  
 RoHS Compliant

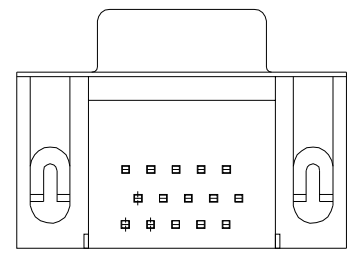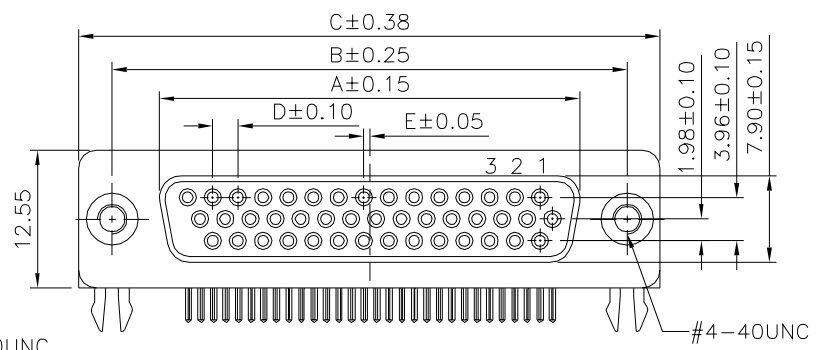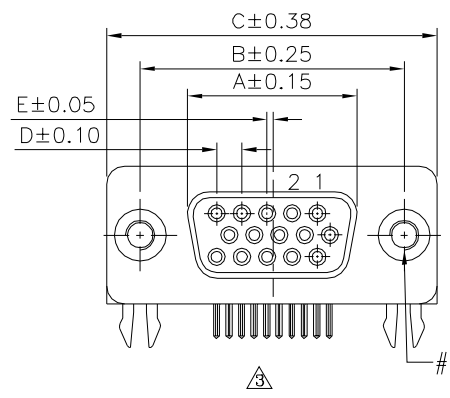

15 Pin

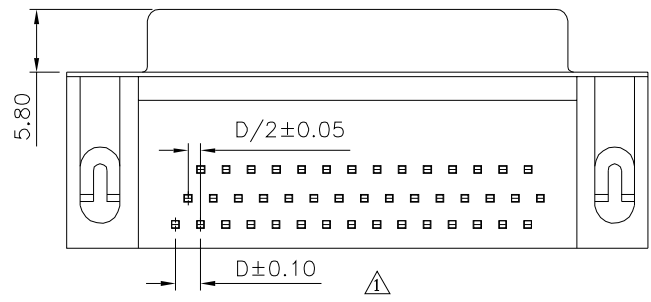

26,44,62 Pin

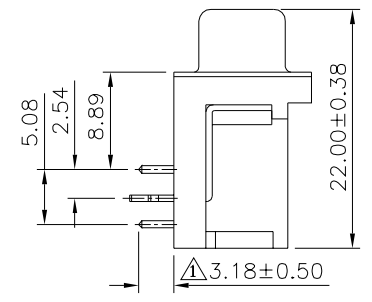

Pin	A	B	C	D	E
15	16.33	24.99	30.81	2.29	0.25
26	24.80	33.32	39.20	2.29	0.50
44	38.38	47.04	53.04	2.29	0.50
62	54.84	63.50	69.40	2.41	0.60

**4U CON** 元化興業股份有限公司  
 4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
02619		MEI	
		CHECKED BY	
		HZF	
DRAWING BY		CYP	
SCALE	NONE	REV.	B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38 .XX\* ±3\*  
 .XX ±0.25 .XX\* ±1\*  
 .XXX ±0.05 .XXX\* ±0.5\*

NO.	REV.	REVISIONS	CHK	DATE
B3		Modify Data	HZF	11/16/2018
B2		Modify Data	HZF	07/18/2017
B1		Modify Data	HZF	12/24/2015
B0		NEW RELEASE	HZF	08/16/2013