File No.	112DH08229	SHEET	1/1

SPECIFICATION

Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 500V DC
Temperature Range:−55°C~+105°C
RoHS Compliant

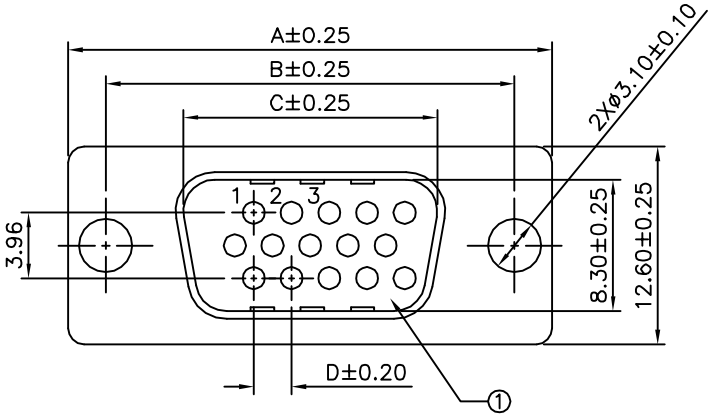



⚠1

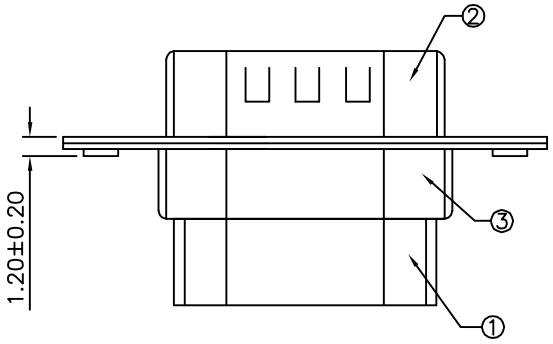

⚠1

Pin	A	B	C	D
15	30.80	25.00	16.92	2.29
26	39.20	33.32	25.25	2.29
44	53.05	47.04	38.96	2.29
62	69.40	63.50	55.42	2.41

	No.	Part Name	Q'ty	Material	Remark
	①	Housing	2	PBT,UL94V−0	Black
⚠1	②	Front−Shell	1	Cold Rolled Steel	Nickel Plated Over Copper
⚠1	③	Back−Shell	1	Cold Rolled Steel	Tin Plated Over Copper

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
02649	EMILY	.X ±0.3
	CHECKED BY HZF	.XX ±0.20
	DRAWING BY SONG	.XXX ±0.100
SCALE NONE	REV. B1	ANG. ±1°
		UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠1	B1	Modify Data	HZF	08/08/2013
⚠0	B0	NEW RELEASE	HZF	11/15/2008