

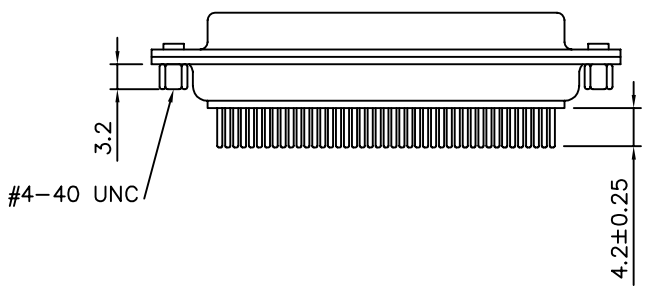


SPECIFICATIONS

Current Rating : 1 AMP
 Dielectric Withstanding Voltage:AC 500V RMS
 Insulation Resistance:500Megohms Min.At DC 500V
 Contact Resistance:30 Milliohms Max.
 Operating Temperature:-55°C To 105°C
 Contact :Brass,Gold Plated
 Insulator:PBT,UL 94V-0
 Shell:Cold Rolled Steel,Tin Plated

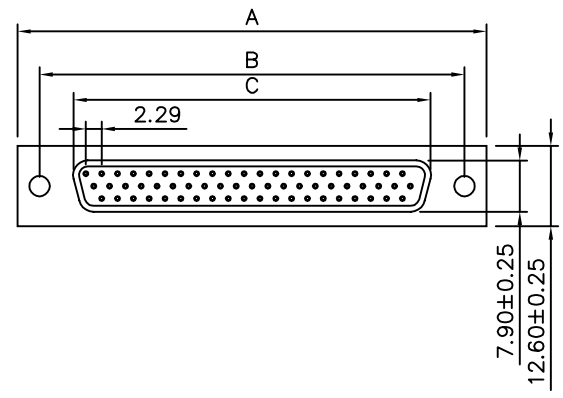

Positions	A±0.25	B±0.25	C±0.25
15	30.80	25.00	16.33
26	39.20	33.32	24.66
44	53.05	47.04	38.38
62	69.40	63.50	54.84

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X .XX ±0.10 .XXX
02683		MEI		
		CHECKED BY		
		RAN		
		DRAWING BY		
		HZF		
SCALE	NONE	REV.	A	UNIT
				mm

AREA	REVISIONS	CHK	DATE