



**△△ SPECIFICATION**


△ Current Rating: 1 Amps  
 Withstanding Voltage: 1000V (1 Minute)  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min. At 500V DC  
 Operating Temperature: -50°C ~ +105°C  
 Shell: SPCC, Front: Nickel Plated, Rear: Tin Plated  
 Insulator: PBT+30%G.F. (UL94V-0), White  
 Contact: Brass, Gold Flash On Contact Area,  
 Tin Plated On Solder Tails, Over Nickel  
 RoHS Compliant

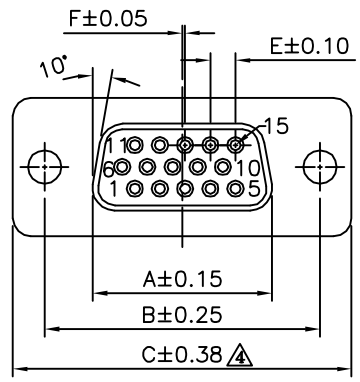


△

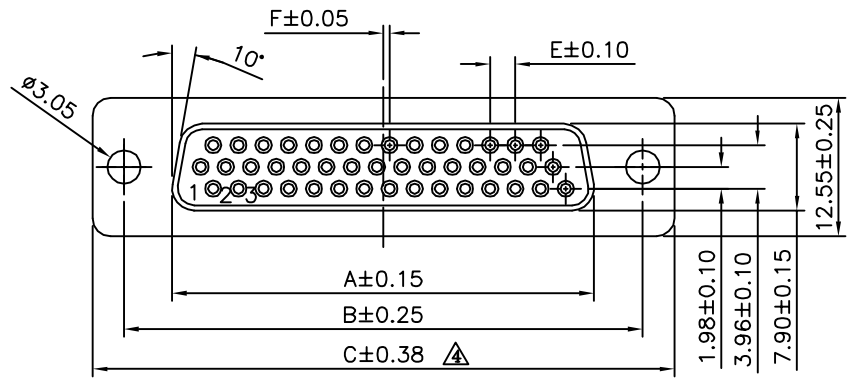


△

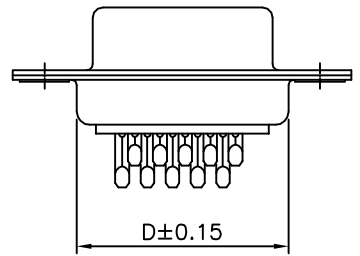

△△ 15 Pin

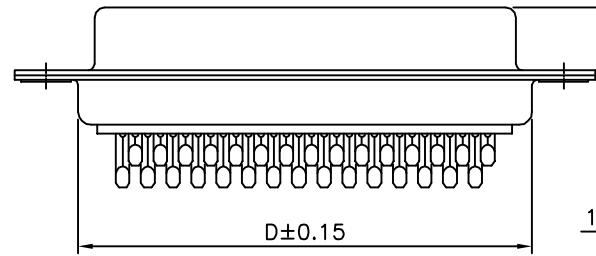

△△ 26, 44, 62 Pin

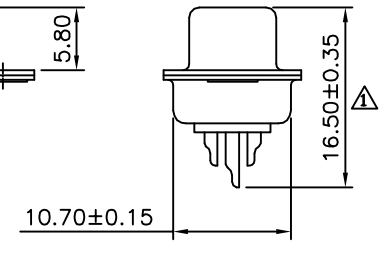

△

Pin	A	B	C	D	E	F
15	16.33	24.99	30.81	19.20	2.29	0.25
26	24.80	33.32	39.20	27.60	2.29	0.50
44	38.38	47.04	53.04	41.00	2.29	0.50
62	54.84	63.50	69.40	57.30	2.41	0.60

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. 02778

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY HAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △.X ±0.38 .X' ±3'  
 △.XX ±0.25 .XX' ±1'  
 △.XXX ±0.05 .XXX' ±0.5'  
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	04/29/2015
△	A3	Modify Data	HZF	10/25/2013
△	A2	Modify Data	HZF	05/10/2012
△	A1	Modify Data	HZF	07/09/2009
△	A0	NEW RELEASE	SHIN	10/12/2006

SCALE NONE REV. A4