







Recommended P.C.B. Layout

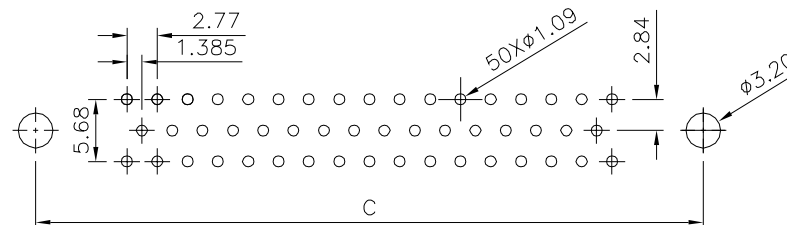


Recommended P.C.B. Layout

△ SPECIFICATION

Current Rating:1 Amps
Withstanding Voltage:500V(One Minute)
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Contact Resistance:30 Milliohms Max.
Operation Temperature:-40°C~+85°C
Insulator:PBT+30%G.F.(UL94V-0),White
Contact:C2680,Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
Shell:SPCC,Front:Nickel Plated,Rear:Tin Plated
RoHS Compliant

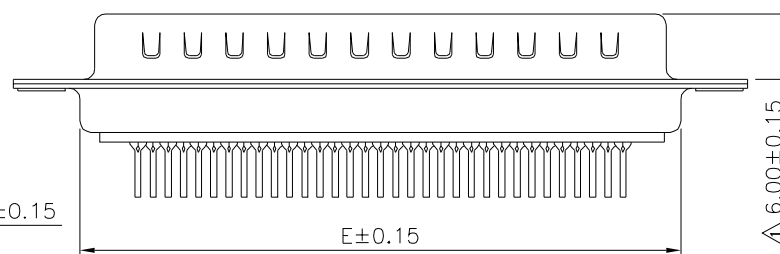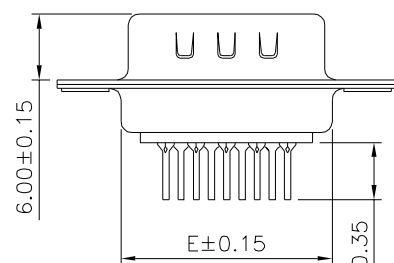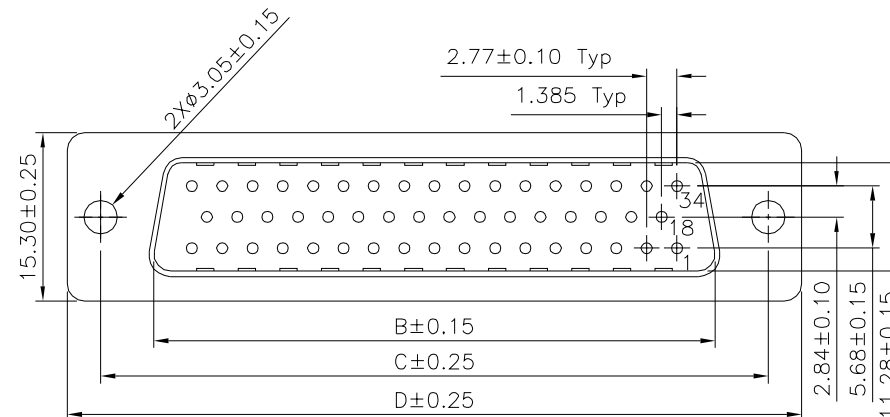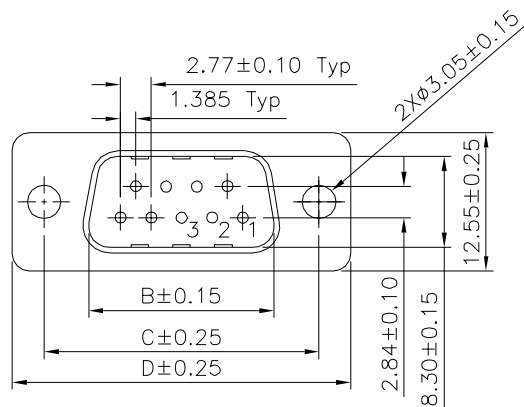

50 Pin



09,15,25,37 Pin

Pin	B	C	D	E
09	16.92	24.99	30.81	19.20
15	25.25	33.32	39.20	27.70
25	38.96	47.04	53.04	41.10
37	55.42	63.50	69.40	57.30
50	52.81	61.00	67.00	55.10

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02885

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 .X* ±3*
.XX ±0.25 .XX* ±1*
.XXX ±0.05 .XXX* ±0.5*

UNIT
mm



NO.

REV.

A1

A0

REVISIONS

CHK

DATE

Modify Data

NEW RELEASE

HZF

HZF

08/10/2017

07/06/2011