

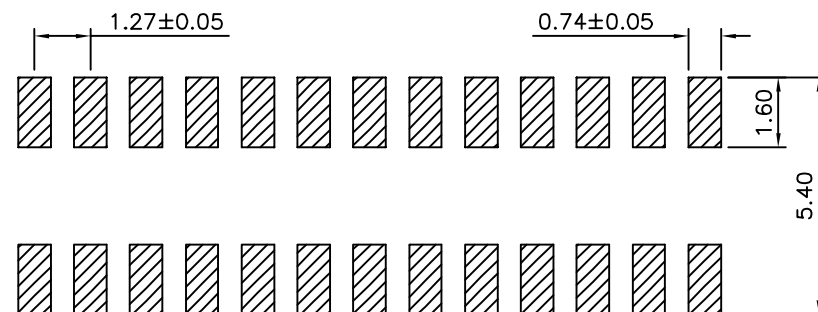



SPECIFICATION

Current Rating:1 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

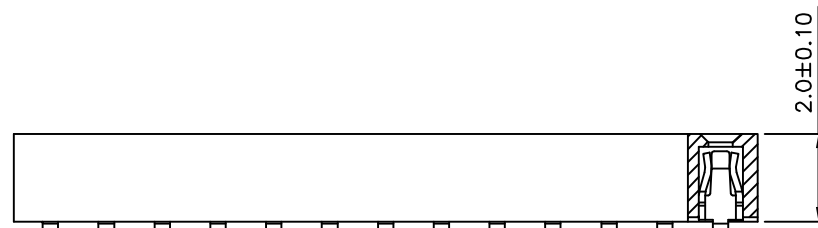

Recommended P.C.B. Layout
(PCB Board Tolerance±0.05)⚠

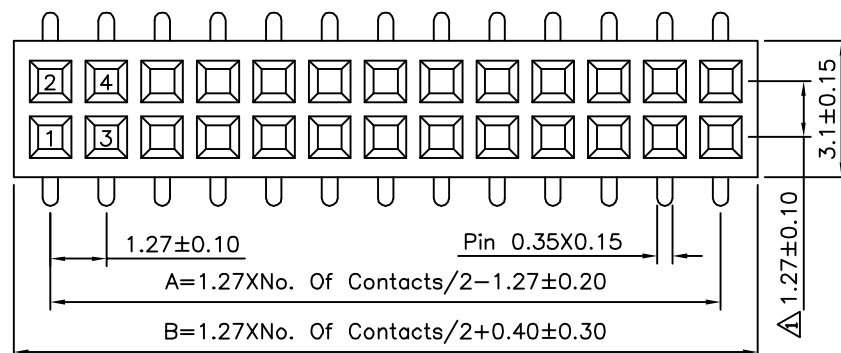

Pin	A	B	Pin	A	B
04	1.27	2.94	54	33.02	34.69
06	2.54	4.21	56	34.29	35.96
08	3.81	5.48	58	35.56	37.23
10	5.08	6.75	60	36.83	38.50
12	6.35	8.02	62	38.10	39.77
14	7.62	9.29	64	39.37	41.04
16	8.89	10.56	66	40.64	42.31
18	10.16	11.83	68	41.91	43.58
20	11.43	13.10	70	43.18	44.85
22	12.70	14.37	72	44.45	46.12
24	13.97	15.64	74	45.72	47.39
26	15.24	16.91	76	46.99	48.66
28	16.51	18.18	78	48.26	49.93
30	17.78	19.45	80	49.53	51.20
32	19.05	20.72	82	50.80	52.47
34	20.32	21.99	84	52.07	53.74
36	21.59	23.26	86	53.34	55.01
38	22.86	24.53	88	54.61	56.28
40	24.13	25.80	90	55.88	57.55
42	25.40	27.07	92	57.15	58.82
44	26.67	28.34	94	58.42	60.09
46	27.94	29.61	96	59.69	61.36
48	29.21	30.88	98	60.96	62.63
50	30.48	32.15	100	62.23	63.90
52	31.75	33.42			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02911

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A1


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

⚠ A1

Modify Data

HZF

04/26/2016

⚠ A0

NEW RELEASE

HZF

04/28/2010