



SPECIFICATIONS:

Contact Current Rating:1 Ampere
 Dielectric Withstanding Voltage: AC 500V R.M.S.
 Insulation Resistance : 500Megohms Min. At DC 500V
 Contact Resistance:30Milliohms. Max.
 Operating Temperature:-40°C ~+70°C
 Contact:Brass , Gold Flashed
 Insulator:P.B.T.UL94V-0 Rated
 Shell:Cold Rolled Steel,Nickel ,Tin,Zinc Plated

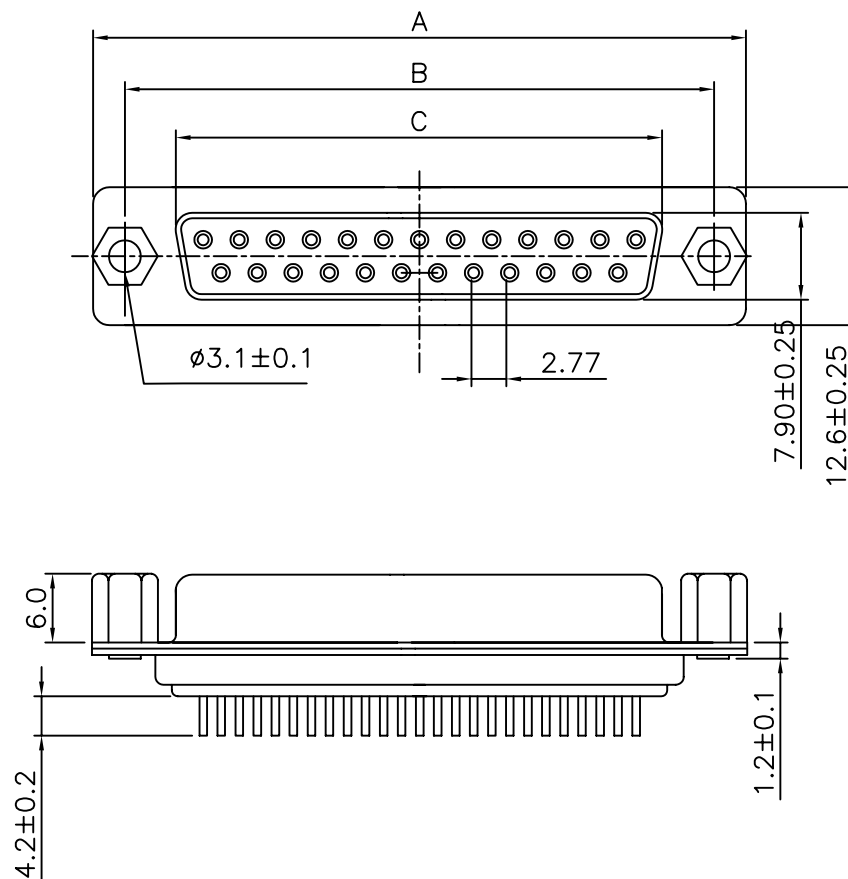

Circuits	A ± 0.25	B ± 0.25	C ± 0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
19	44.80	38.86	30.00
23	50.30	44.30	35.50
25	53.05	47.04	38.40
37	69.40	63.50	54.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02917

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED

TOLERANCES ARE

.X ± 0.38

.XX ± 0.25

AWG.

UNIT

mm



NO. REV.

A NEW RELEASE

REVISIONS

RAN

CHK

DATE

SCALE

NONE

REV.

A