





Recommended P.C.B. Layout

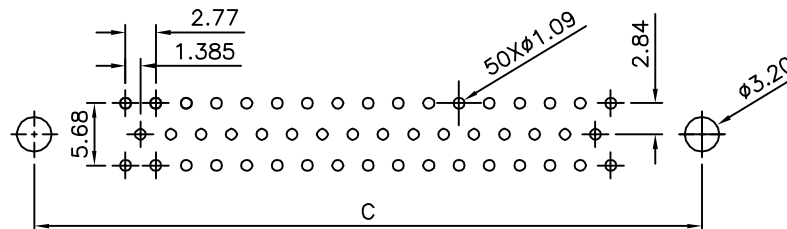



Recommended P.C.B. Layout

△△ SPECIFICATION


Current Rating:5 Amps
Withstanding Voltage:1000V(One Minute)
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Contact Resistance:20 Milliohms Max.
Operation Temperature:-50°C~+105°C
Insulator:PBT+30%G.F.(UL94V-0),White
Contact:Brass,Gold Flash Over Nickel
Shell:SPCC,Front:Nickel Plated,Rear:Tin Plated
Nut:Copper Alloy,Nickel Plated
RoHS Compliant

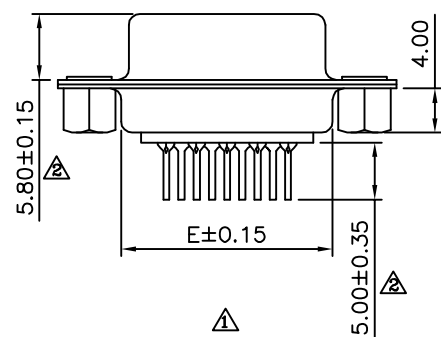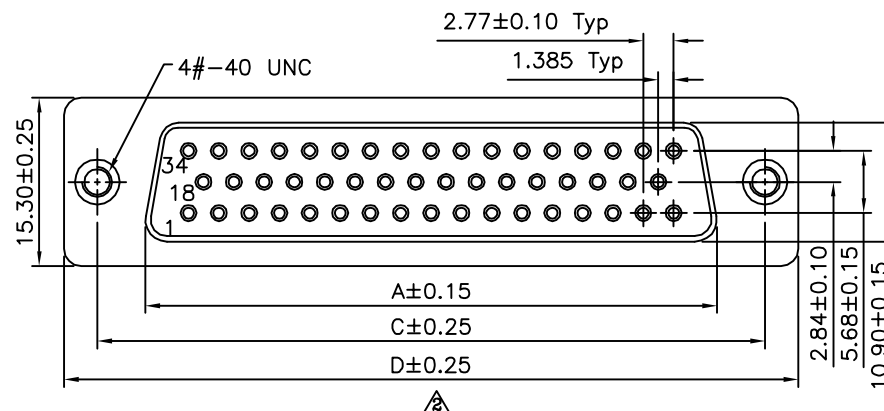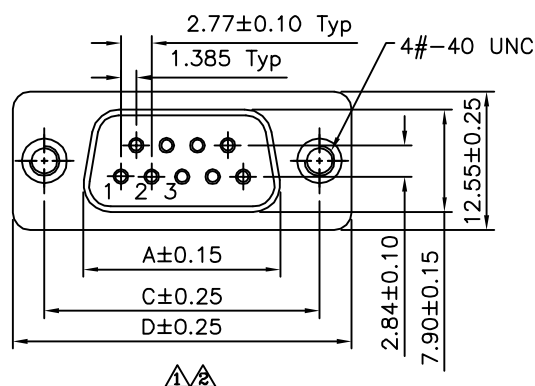

09,15,25,37 Pin

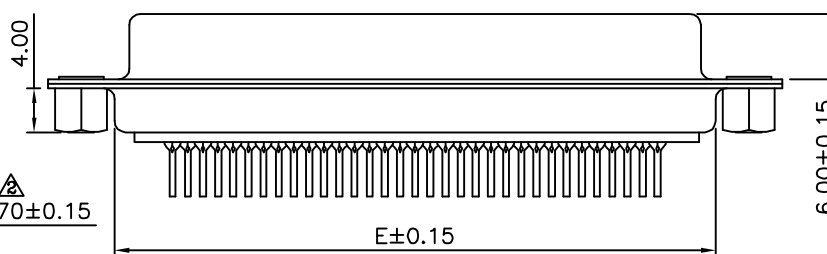

△ 50 Pin



Pin	A	C	D	E
09	16.33	24.99	30.81	19.20
15	24.80	33.32	39.20	27.70
25	38.38	47.04	53.04	41.10
37	54.84	63.50	69.40	57.30
50	52.20	61.00	67.00	55.10

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02918

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38 .X* ±3*
.XX ±0.25 .XX* ±1*
.XXX ±0.05 .XXX* ±0.5*

UNIT

mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	11/30/2011	
△ A1	Modify Data	HZF	04/26/2011	
△ A0	NEW RELEASE	HZF	07/28/2009	