

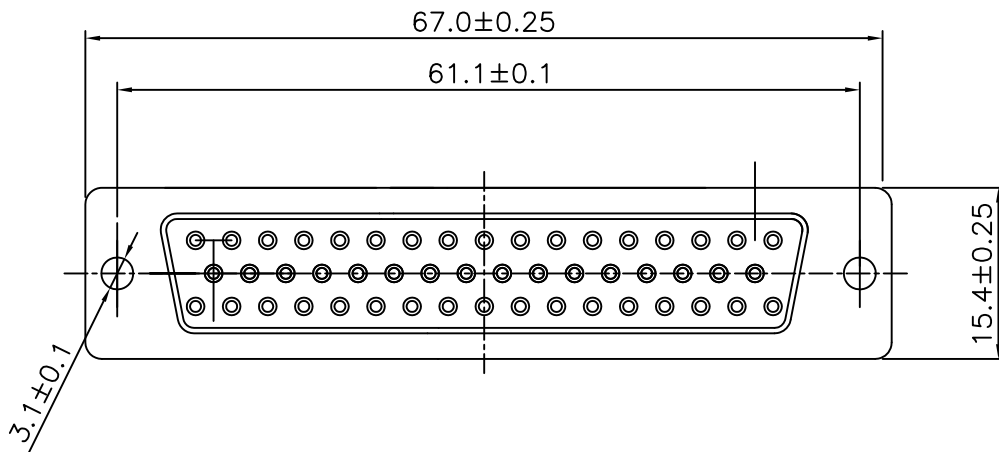
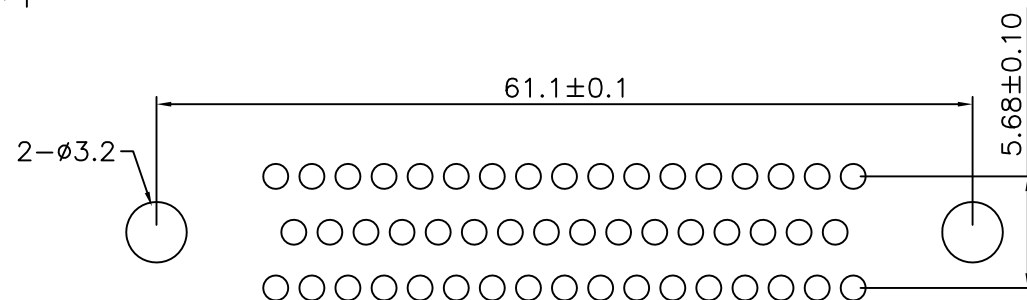




SPECIFICATIONS:
Contact Current Rating:1 Amp
Dielectric Withstanding Voltage: AC 500V R.M.S.
Insulation Resistance:500 Megohms Min. at DC 500V
Contact Resistance:30 Milliohms Max.
Operating Temperature:-55°C ~+105°C
Contact:Brass,Gold Flashed
Insulator:P.B.T.UL94V-0 Rated
Shell:Cold Rolled Steel,Nickel,Tin,Zinc Plated

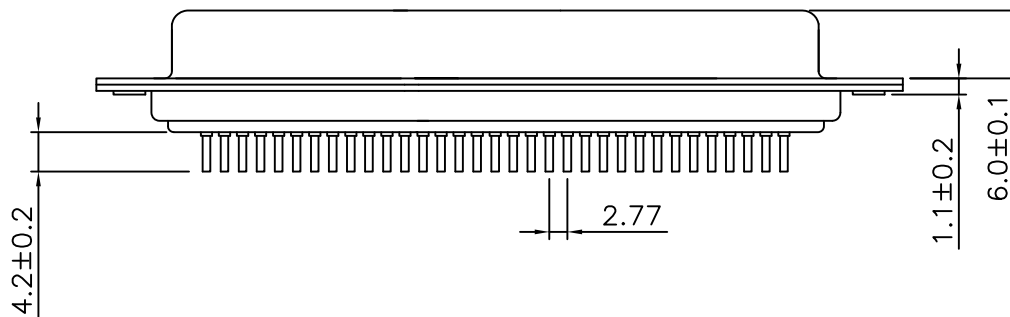

PCB Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02948

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT

MM



A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE