

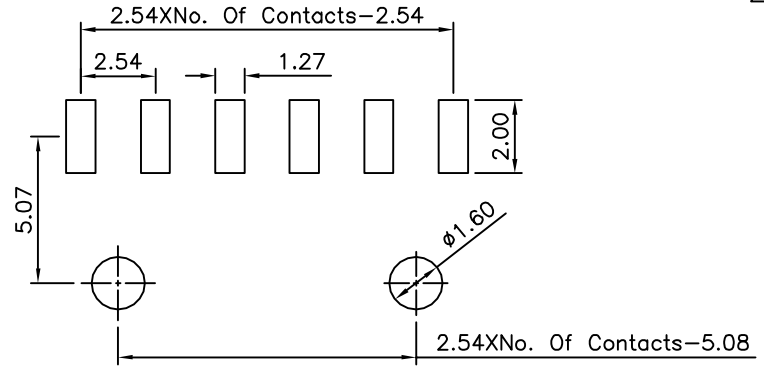
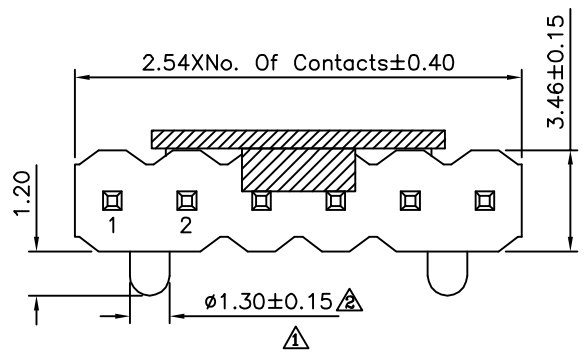


△ SPECIFICATION

Current:3A
 Withstand Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:3~40 Contacts
 RoHS Compliant

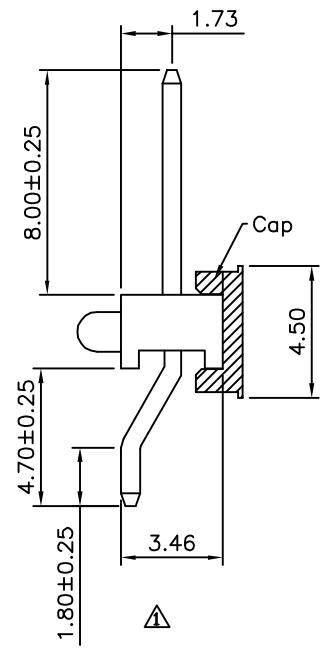

△ Recommended P.C.B Layout

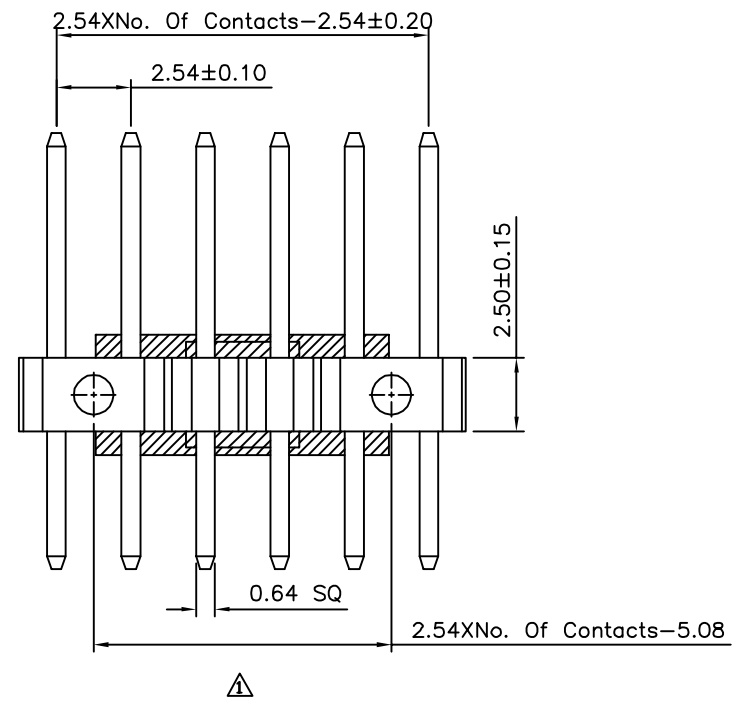

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 02978
 SCALE NONE

APPROVED BY EMILY
 CHECKED BY HZF
 DRAWING BY HAO
 REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Dim.	HZF	03/03/2015
△ A1		Modify Data	HZF	06/04/2014
△ A0		NEW RELEASE	HZF	11/24/2006