


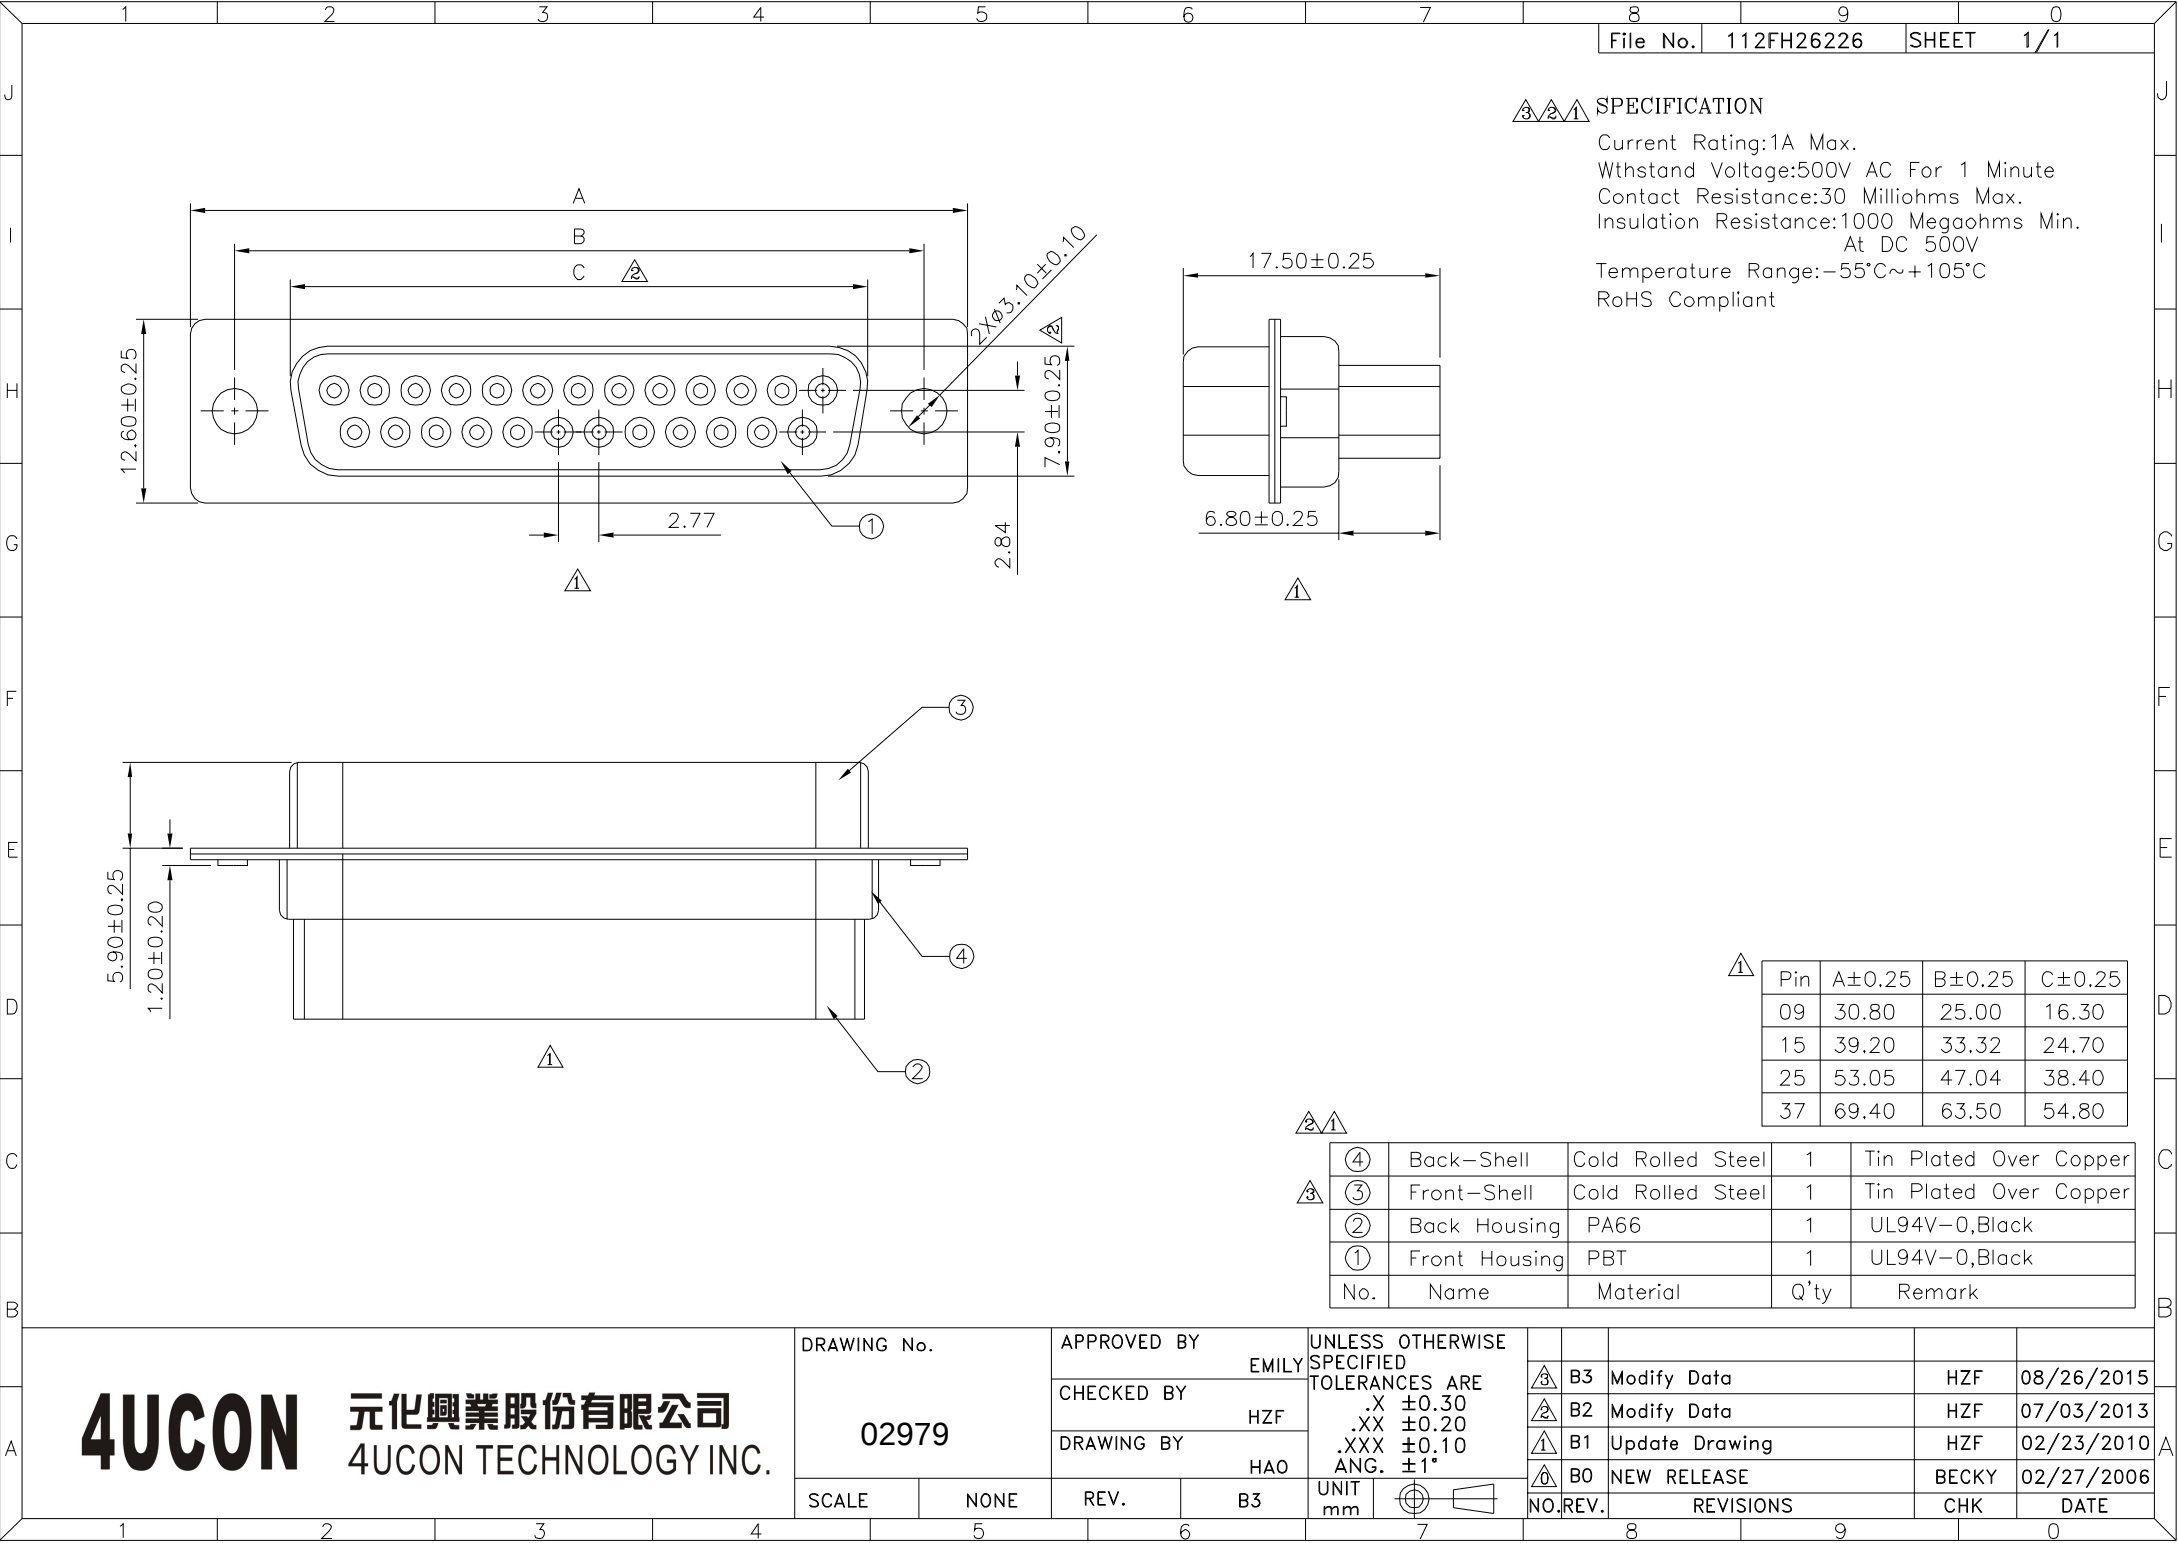

SPECIFICATION
Current Rating:1A Max.
Wthstand Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

Pin	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80

④	Back-Shell	Cold Rolled Steel	1	Tin Plated Over Copper
③	Front-Shell	Cold Rolled Steel	1	Tin Plated Over Copper
②	Back Housing	PA66	1	UL94V-0,Black
①	Front Housing	PBT	1	UL94V-0,Black
No.	Name	Material	Q'ty	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02979		APPROVED BY EMILY	
		CHECKED BY HZF	
		DRAWING BY HAO	
SCALE	NONE	REV.	B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°
UNIT mm

③	B3	Modify Data		HZF	08/26/2015
②	B2	Modify Data		HZF	07/03/2013
①	B1	Update Drawing		HZF	02/23/2010
①	B0	NEW RELEASE		BECKY	02/27/2006
NO.	REV.	REVISIONS	CHK	DATE	