


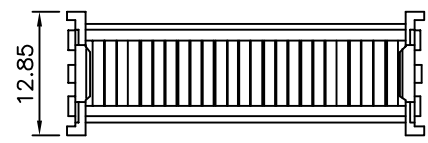
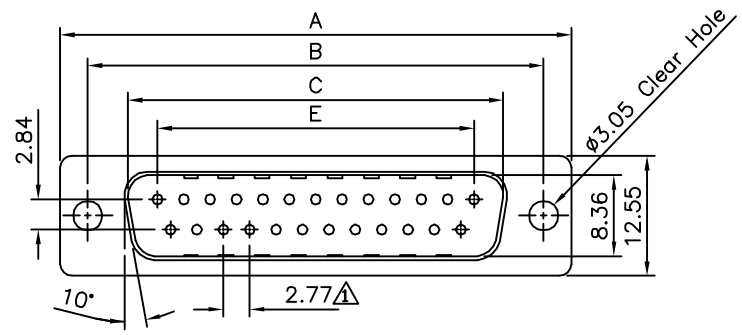


△ SPECIFICATION



Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Withstand Voltage:1000V AC/RMS 60Hz For 1 Minute
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Insulator:PBT+G.F.(UL94V-0),Blue
 Contact:Brass
 Gold Flash Over Nickel On Contact Area
 Nickel Plated On IDC Area
 Shell:Steel,Tin Plated Over Copper
 RoHS Compliant

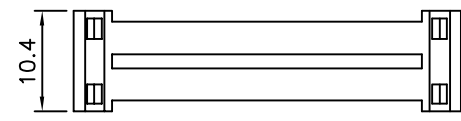

△ Cover

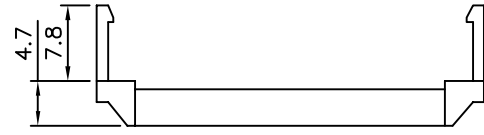

△ Strain Relief

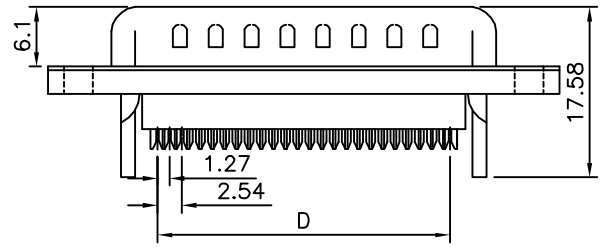

Pin	A	B	C	D	E
9	30.81	24.99	16.92	10.16	11.08
15	39.20	33.30	25.25	17.78	19.39
25	53.05	47.04	38.96	30.48	33.24
37	69.40	63.50	55.42	45.72	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.38 .XX ±0.25 .XXX ±0.13 X: ±1.0°
03009		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		GAO		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	10/17/2012
△ A0		NEW RELEASE	HZF	06/03/2008