




△ SPECIFICATION


Current Rating:3 AMP
 Volatge Rating:250 VAC/RMS 60Hz
 Contact Resistance:20 Milliohms Max. At 1 AMP DC.
 Insulation Resistance:1000 Megaohms At 500V DC
 Dielectric Withstanding Voltage:
 1000V AC/RMS For 1 Minute
 Insulator:PBT+G.F.(UL94V-0),Blue
 Contact:Copper Alloys,Selective Gold Flash
 Shell:Steel,Tin Plated Over Copper
 Clinch Nut:Brass,Nickel Plated
 RoHS Compliant

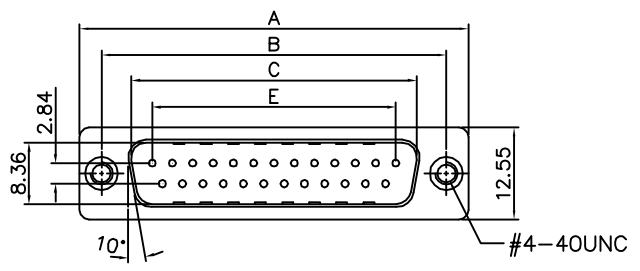

Cover

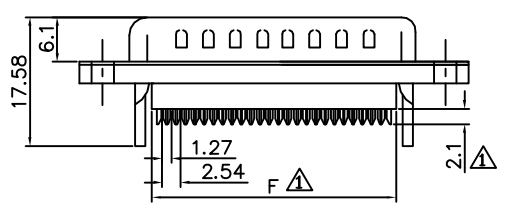

With Insulator Support



Strain Relief

△

Pin	A	B	C	E	F
9	30.81	24.99	16.92	11.08	13.10
15	39.20	33.30	25.25	19.39	20.70
25	53.04	47.04	38.96	33.24	33.68
37	69.40	63.50	55.42	49.86	50.30

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.38 X.* ±3* .X ±0.25 .X* ±1.0* .XX ±0.13
03014		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		SONG		
SCALE	NONE	REV.	A1	

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	08/06/2011
△ A0		NEW RELEASE	HZF	05/26/2007