

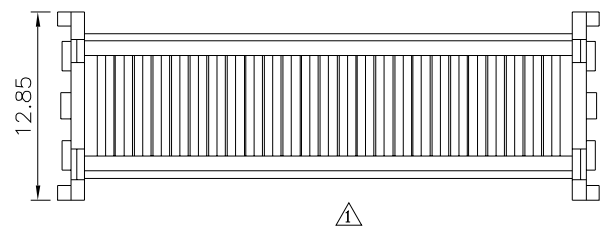
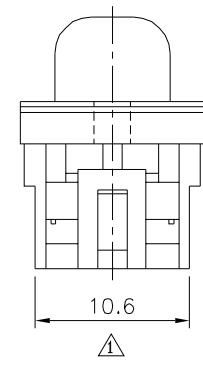


△ SPECIFICATION


- △ Current Rating:3 Amp
- Voltage Rating:250V AC/RMS 60Hz
- Contact Resistance:20 Milliohms Max. At 1 Amp DC
- Insulation Resistance:1000 Megaohms At 500V DC
- Dielectric Withstanding Voltage:1000V AC/RMS 60Hz For 1 Minute
- Insulator:PBT+G.F.(UL94V-0),Blue
- △ Contact:Brass,Gold Plated On Contact Area,Tin Plated On Solder Tails,Over Nickel
- △ Shell:Steel,Nickel Plated Over Copper
- Clinch Nut:Brass,Nickel Plated
- RoHS Compliant

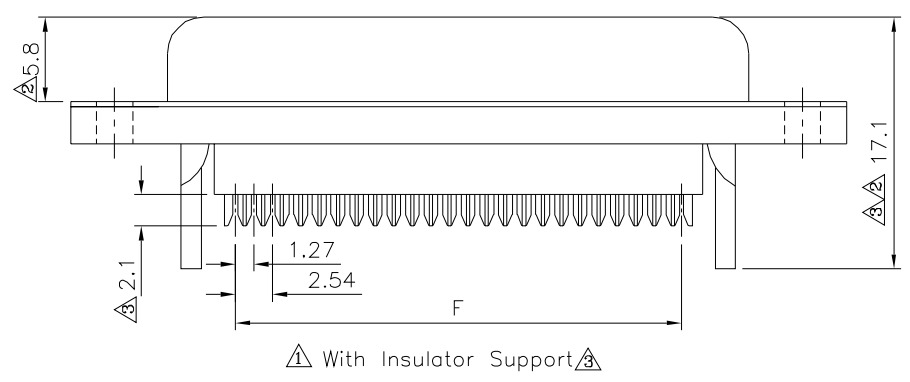

△△ Cover

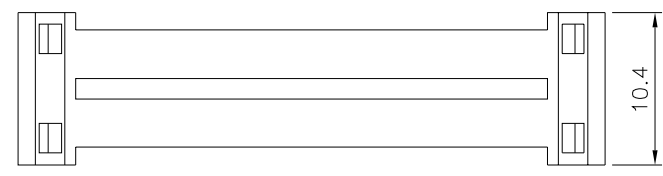

△△ Strain Relief

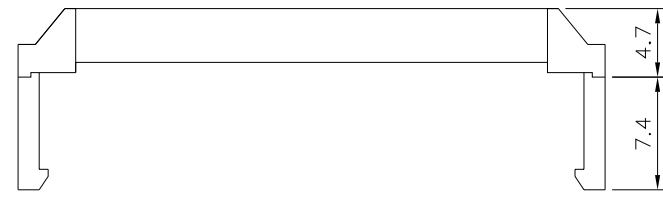

△△△△	Pin	A	B	C	E	F
	09	30.81	24.99	16.33	11.08	10.16
	15	39.20	33.30	24.70	19.39	17.78
	25	53.05	47.04	38.40	33.24	30.48
	37	69.40	63.50	54.80	49.86	45.72

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △
03040

APPROVED BY MEI
CHECKED BY HZF
DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.38 X.* ±3.0°
.X ±0.25 .X* ±1.0°
.XX ±0.13 △△

SCALE NONE

REV. B3

NO.	REV.	REVISIONS	CHK	DATE
△	B3	Modify Data	HZF	08/02/2019
△	B2	Modify Data	HZF	11/01/2013
△	B1	Modify Data	HZF	09/07/2013
△	B0	NEW RELEASE	HZF	11/18/2008