

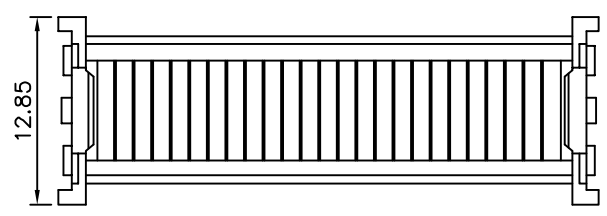
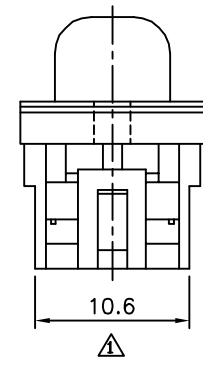


△ SPECIFICATION



△ Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megaohms At 500V DC
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
 For 1 Minute
 Insulator:PBT+G.F.(UL94V-0),Black
 Contact:Brass,Selective Gold Flash Over Nickel
 Shell:Steel,Tin Plated Over Nickel
 Chinch Nut:Brass,Nickel Plated
 RoHS Compliant

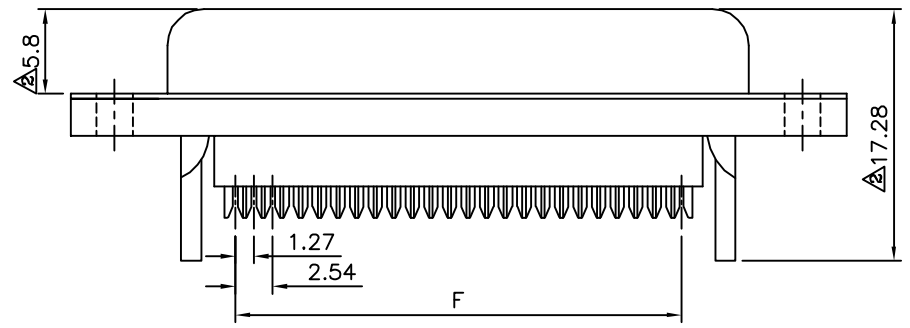

△ Cover

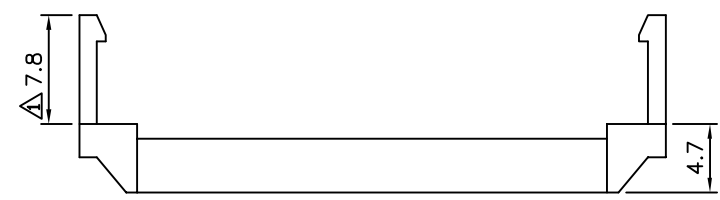

△ Strain Relief

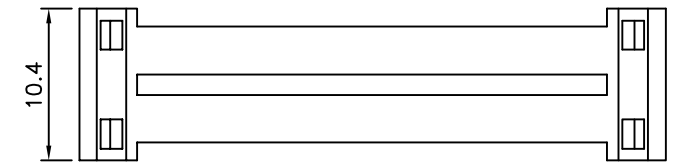

Pin	A	B	D	E	F
09	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.66	19.39	17.78
25	53.05	47.04	38.38	33.24	30.48
37	69.40	63.50	54.84	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.30 X.* ±3* .X ±0.25 .X.* ±1.0* .XX ±0.13
03041		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT mm
		YBL		
SCALE	NONE	REV.	B2	

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	11/01/2013
△ B1		Modify Data	HZF	09/07/2013
△ B0		NEW RELEASE	HZF	11/18/2008