

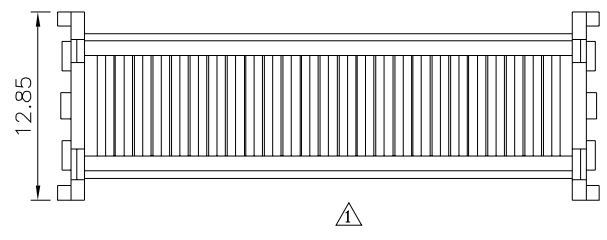
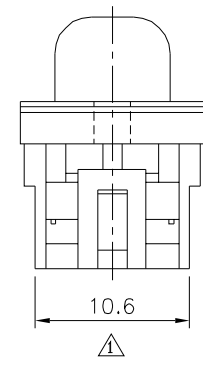



△ SPECIFICATION
 △ Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megaohms At 500V DC
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
 For 1 Minute
 Insulator:PBT+G.F.(UL94V-0),Blue
 △ Contact:Brass,Gold Plated On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 △ Shell:Steel,Nickel Plated Over Copper
 Clinch Nut:Brass,Nickel Plated
 RoHS Compliant

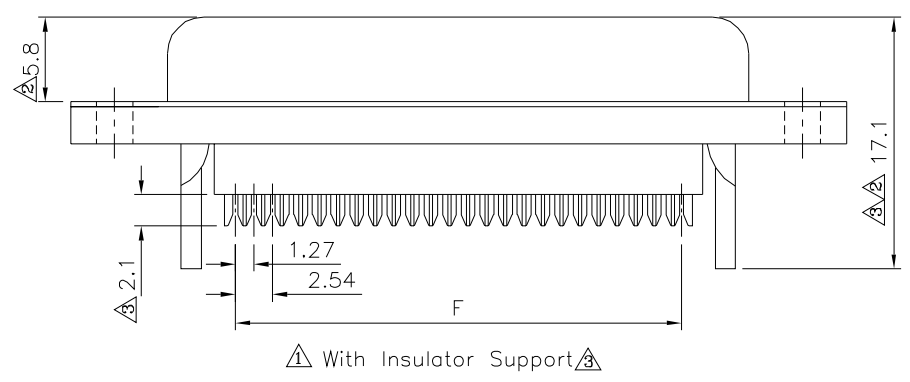

△△ Cover

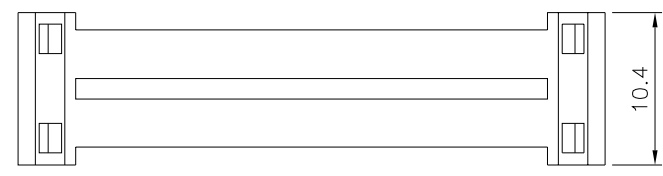

△△ Strain Relief

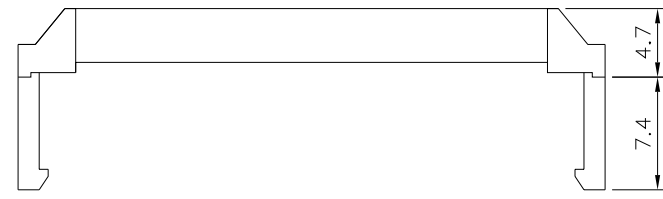

Pin	A	B	C	E	F
09	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.70	19.39	17.78
25	53.05	47.04	38.40	33.24	30.48
37	69.40	63.50	54.80	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △
 03046

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.38 X.* ±3.0°
 .X ±0.25 .X* ±1.0°
 .XX ±0.13 △△

SCALE NONE REV. B3 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	B3	Modify Data	HZF	08/02/2019
△	B2	Modify Data	HZF	11/01/2013
△	B1	Modify Data	HZF	09/07/2013
△	B0	NEW RELEASE	HZF	11/18/2008