



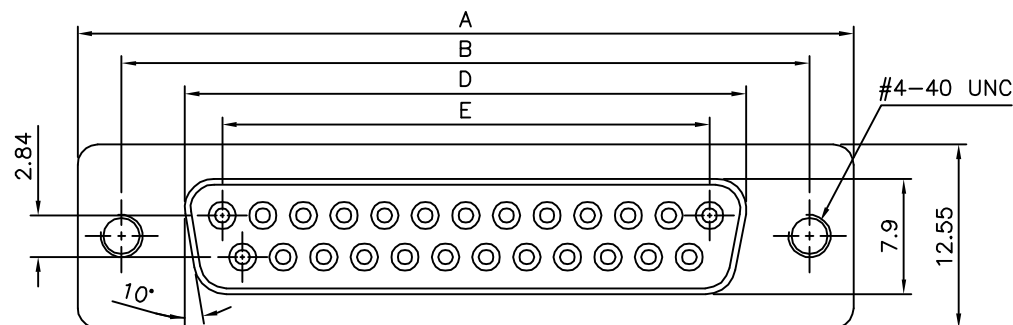


△ SPECIFICATION


△ Current Rating:3 Amp
 Voltage Rating:250V AC/RMS 60Hz
 Contact Resistance:20 Milliohms Max. At 1 Amp DC
 Insulation Resistance:1000 Megaohms At 500V DC
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz
 For 1 Minute
 Insulator:PBT+G.F.(UL94V-0),Black
 Contact:Brass,Selective Gold Flash Over Nickel
 Shell:Steel,Tin Plated Over Nickel
 Chinch Nut:Brass,Nickel Plated
 RoHS Compliant

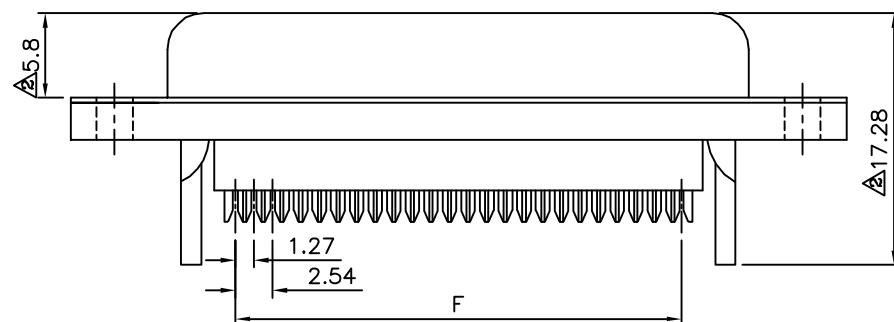


△ Without Insulator Support




△

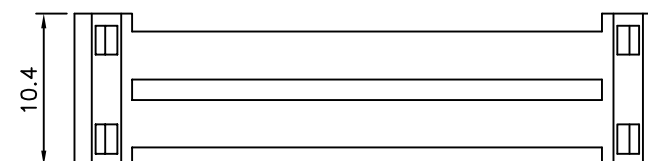

△ Strain Relief

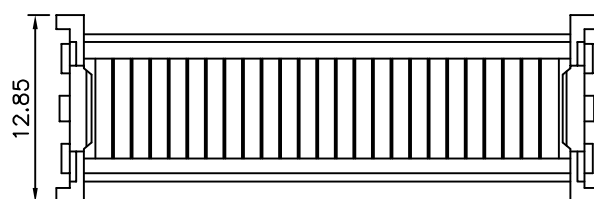

△



△ Cover

Pin	A	B	D	E	F
09	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.66	19.39	17.78
25	53.05	47.04	38.38	33.24	30.48
37	69.40	63.50	54.84	49.86	45.72

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03053

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

YBL

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.30 X." ±3"

.X ±0.25 .X" ±1.0"

.XX ±0.13 △

UNIT mm



SCALE

NONE

REV.

B2

NO. REV.

REVISIONS

CHK

DATE

△ B2 Modify Data HZF 11/01/2013

△ B1 Modify Data HZF 09/07/2013

△ B0 NEW RELEASE HZF 11/18/2008