
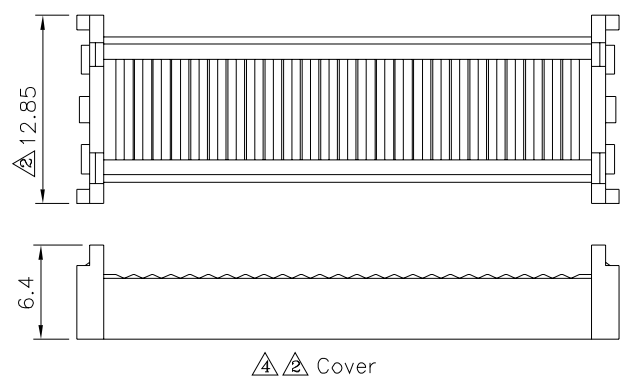
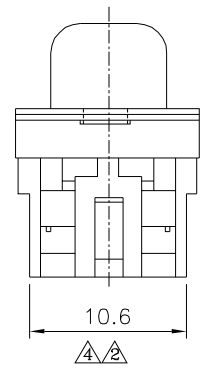


**△/△ SPECIFICATION**  
 Current Rating:3 Amp  
 Voltage Rating:250V AC/RMS 60Hz  
 Withstanding Voltage:1000V AC/RMS 60Hz/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Insulator:PBT+G.F.(UL94V-0),Blue  
 △ Contact:Brass  
 Shell:Steel,Tin Plated Over Copper  
 RoHS Compliant

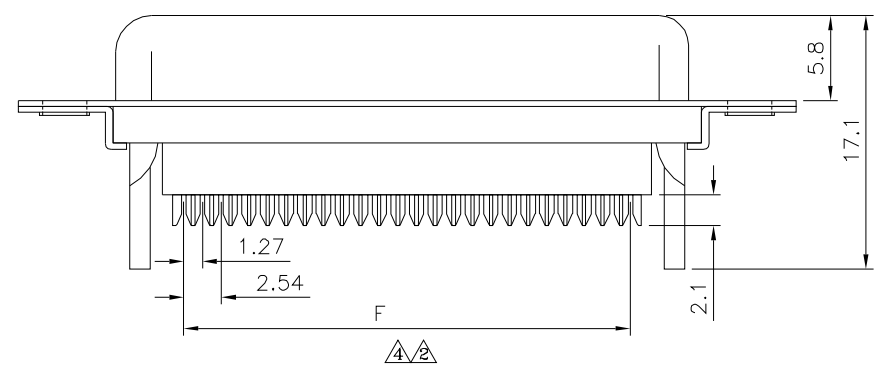

△ Pin	A	B	C	E	F
9	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.70	19.39	17.78
25	53.05	47.04	38.40	33.24	30.48
37	69.40	63.50	54.80	49.86	45.72

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
03062		EMILY		X. ±0.38 X.* ±3°	
		CHECKED BY		.X ±0.25 .X* ±1.0°	
		HZF		.XX ±0.13	
		DRAWING BY		UNIT	
		SONG		mm	
SCALE	NONE	REV.	A4	△	

NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	12/20/2022
△	A3	Modify Data	HZF	06/21/2014
△	A2	Modify Data	HZF	03/04/2010
△	A1	Modify Data	SHIN	02/26/2007
△	A0	NEW RELEASE		