
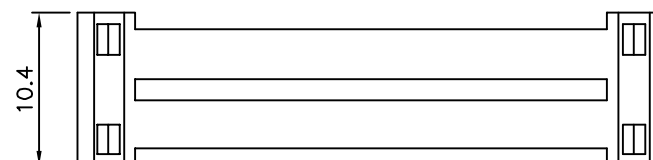
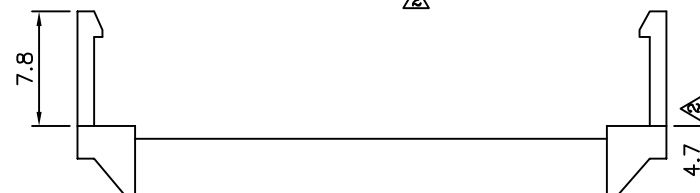
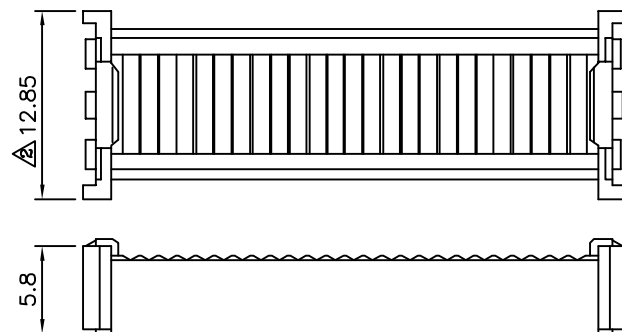
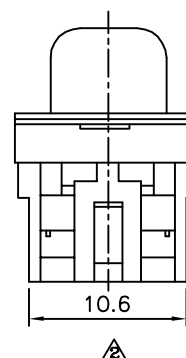
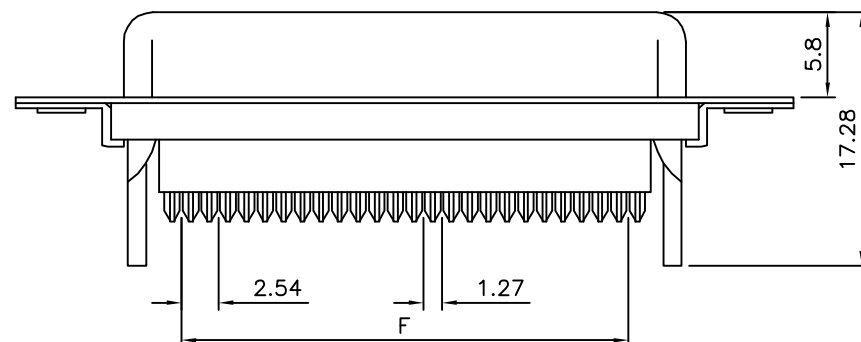


△ SPECIFICATION

Current Rating:3 Amp
Voltage Rating:250V AC/RMS 60Hz
Dielectric Withstanding Voltage:1000V AC/RMS 60Hz For 1 Minute
Contact Resistance:20 Milliohms Max. At 1 Amp DC
Insulation Resistance:1000 Megaohms Min. At 500V DC
Insulator:PBT+G.F.(UL94V-0),Blue
Contact:Brass,Selective Gold Plated
Shell:Steel,Tin Plated Over Copper
RoHS Compliant

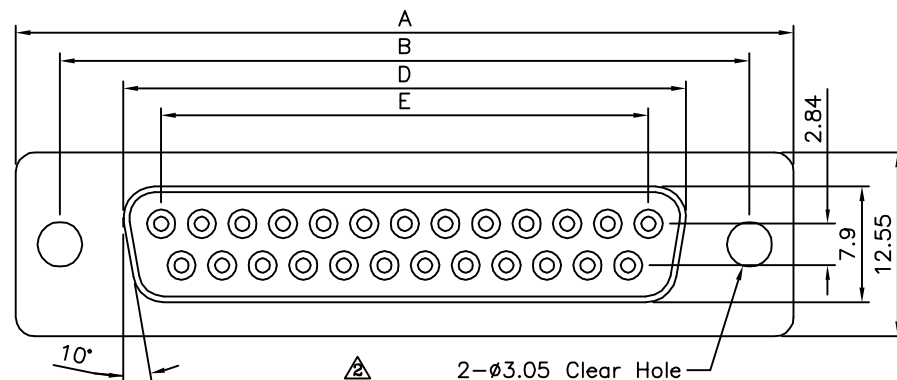

△ Cover

△ Strain Relief

Pos.	A	B	D	E	F
9	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.66	19.39	17.78
25	53.05	47.04	38.38	33.24	30.48
37	69.40	63.50	54.84	49.86	45.72

DRAWING No.

03065

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

WZL

SCALE

NONE

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.38 X.* ±3°

.X ±0.25 .X* ±1.0°

.XX ±0.13

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/04/2010
△ A1		Modify Data	SHIN	02/26/2007
△ A0		NEW RELEASE		

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.