
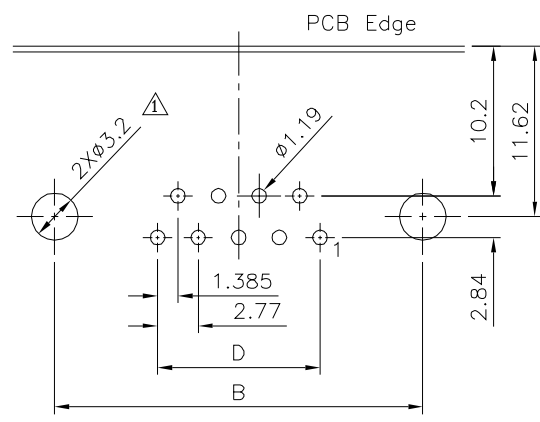
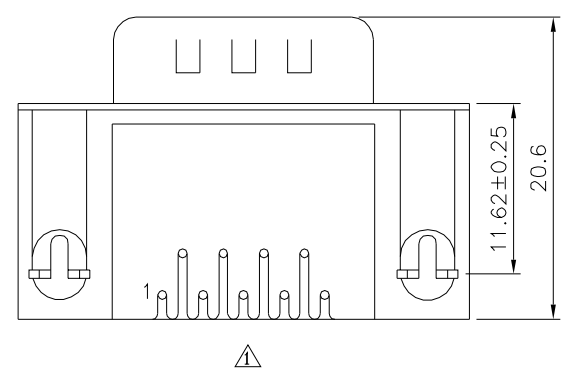
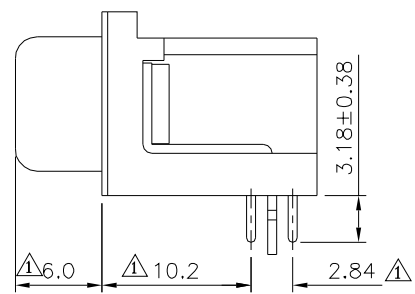


**△ SPECIFICATION**

Current Rating:5 Amp  
 Dielectric Withstanding Voltage:1000V AC For 1 Minute  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Contact Resistance:15 Milliohms Max.  
 Operating Temperature:-55°C~+105°C  
 Insulator:PBT(UL94V-0),Black  
 Contact:Copper Alloy,Gold Flash Over Nickel  
 Shell:Steel,Nickel Plated  
 Boardlock:Steel,Tin Plated  
 Riveted Insert:Brass,Nickel Plated  
 RoHS Compliant

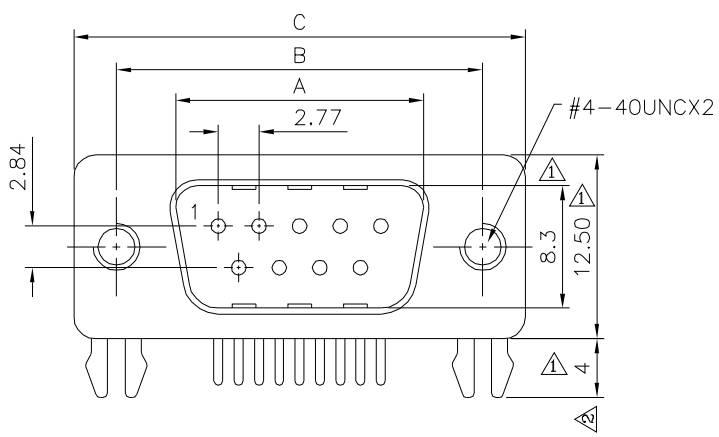

△ Pin	A±0.20	B±0.20	C±0.38	D
09	16.90	25.00	30.80	11.08
15	25.25	33.30	39.20	19.39
25	38.95	47.05	53.05	33.24
37	55.40	63.50	69.40	49.86

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. **03119**

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.15  
 .XXX ±0.05  
 ANG. ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/20/2018
△ A1		Modify Data	HZF	10/21/2011
△ A0		NEW RELEASE		