
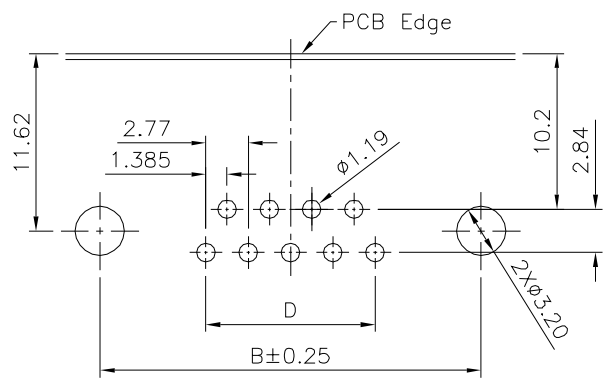


**△ SPECIFICATION**  
 Current Rating:5 Amp  
 Dielectric Withstanding Voltage:1000V Per Minute  
 △ Contact Resistance:30 Milliohms Max. 10 Sec.  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Operating Temperature:-55°C~+105°C  
 Insulator:PBT+25%G.F.(UL94V-0),Black  
 Contact:Brass,Gold Plated Over Nickel  
 △ Grounding:SPCC,Tin Plated  
 Shell:SPCC,Nickel Plated  
 Screw:Brass,Nickel Plated  
 RoHS Compliant

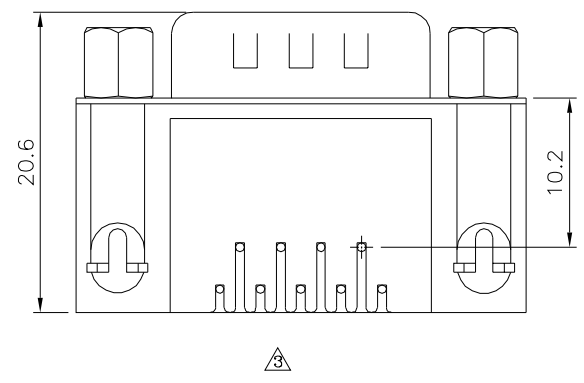

Recommended P.C.B. Layout △

Pin	A	B	C	D
09	16.92	24.99	30.80	11.08
15	25.25	33.32	39.10	19.39
25	38.96	47.04	53.00	33.24
37	55.42	63.50	69.32	49.86

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △△  
**03122**

APPROVED BY MEI  
 CHECKED BY HZF  
 DRAWING BY CYP

SCALE NONE REV. A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 △ .X ±0.50  
 △ .XX ±0.25  
 △ .XXX ±0.15  
 ANG. ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Data	HZF	05/05/2016
△2	A2	Modify Data	HZF	11/12/2013
△1	A1	Modify Data	HZF	05/14/2012
△0	A0	NEW RELEASE	HZF	06/28/2007