
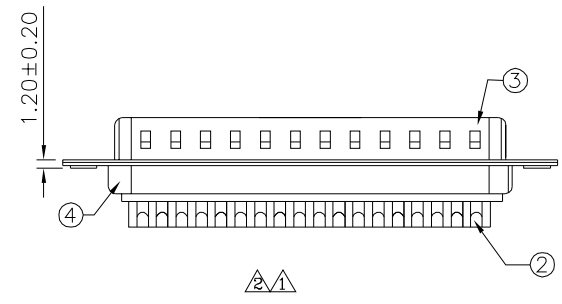
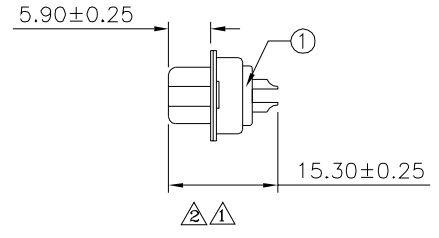


△ SPECIFICATION
 Current Rating:1A Max.
 Withstanding Voltage:500V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Temperature Range:-55°C~+105°C
 RoHS Compliant

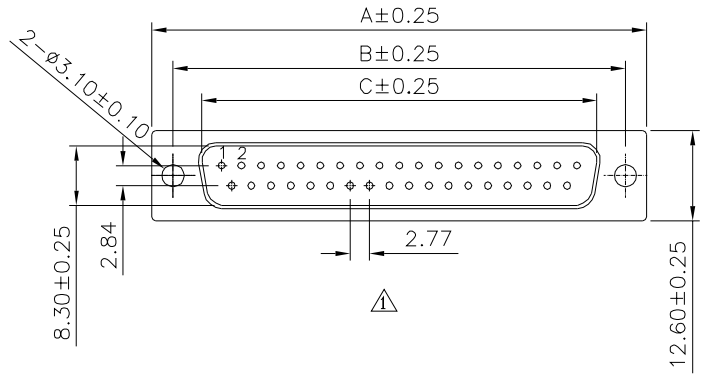

Pin	A	B	C
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

△ ④	Back-Shell	Steel	1	Tin Plated Over Copper
③	Front-Shell	Steel	1	Nickel Plated Over Copper
②	Contact	Brass	9~37	Gold Flash Over All,Over Nickel
△ ①	Housing	PBT,UL94V-0	2	Blue
No.	Part Name	Material	Q'ty	Finish

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 03196

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY SONG
 SCALE NONE REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ 2	A2	Modify Data	HZF	12/12/2023
△ 1	A1	Modify Data	HZF	04/19/2022
△ 0	A0	NEW RELEASE	HZF	05/27/2013