
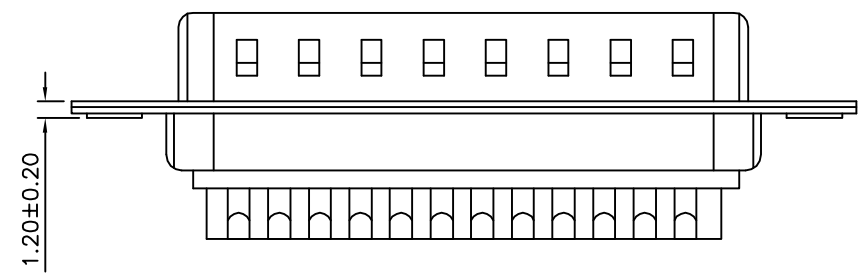



SPECIFICATION

Current Rating:1A Max.
 Dielectric Withstanding Voltage:500V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Temperature Range:-55°C~+105°C
 Housing:PBT(UL94V-0),White
 Contact:Brass,Gold Flash Over All,Over Nickel
 Front Shell:Cold Rolled Steel,Nickel Plated Over Copper
 Back Shell:Cold Rolled Steel,Tin Plated Over Copper
 RoHS Compliant

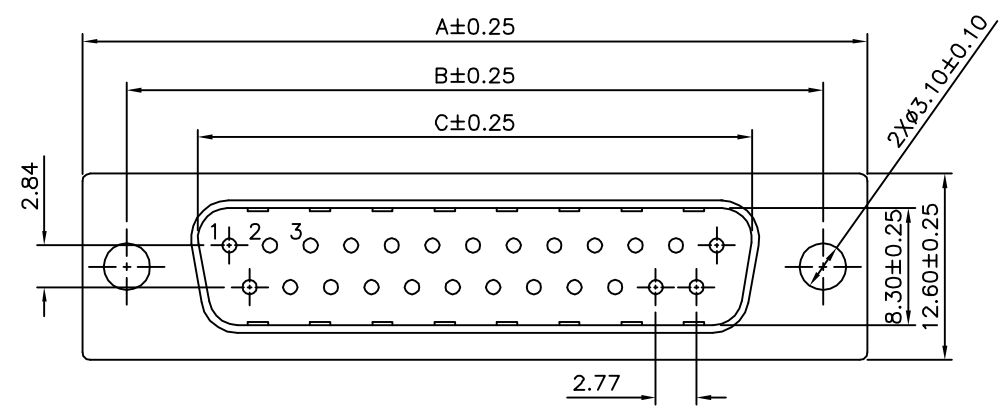

Pin	A	B	C
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
PART No. DSXXPGT-XX-H		MEI		
DRAWING No. 03205		CHECKED BY HZF		
DSXXPGT-XX-H		DRAWING BY SONG		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	05/27/2013