
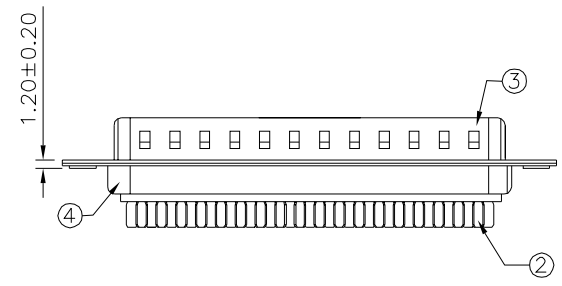
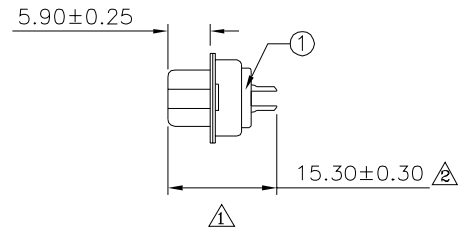


△△ SPECIFICATION

Current Rating:1A Max.
 Dielectric Withstanding Voltage:500V AC For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Temperature Range:-55°C~+105°C
 RoHS Compliant

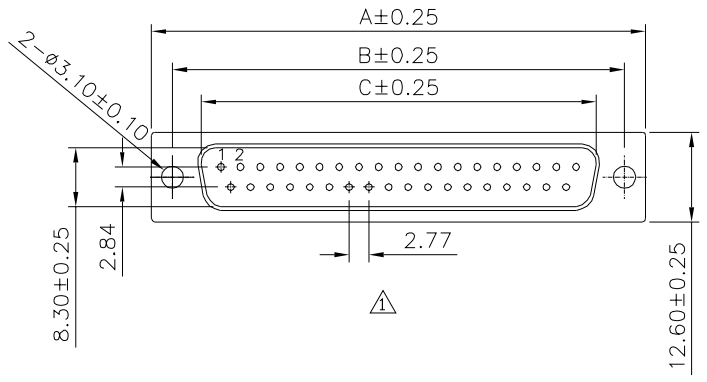

△△ Pin	A	B	C
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

△④	Back-Shell	1	Steel	Tin Plated Over Copper
△③	Front-Shell	1	Steel	Nickel Plated Over Copper
△②	Contact	9~37	Brass	Gold Flash On Contact Area, Tin Plated On Solder Tail, Over Nickel
△①	Housing	2	PBT,UL94V-0	Blue
No.	Part Name	Q'ty	Material	Finish

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
03208		MEI		
		CHECKED BY HZF		
		DRAWING BY SONG		UNIT mm
SCALE	NONE	REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	04/14/2022
△A1		Modify Data	HZF	12/09/2013
△A0		NEW RELEASE	BECKY	02/06/2006