
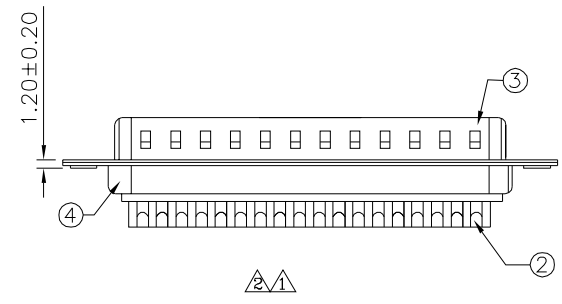
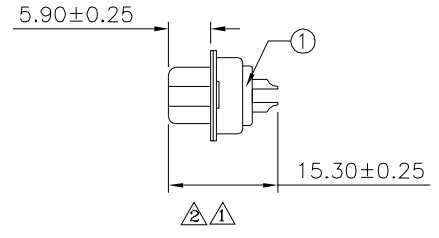


**△ SPECIFICATION**

Current Rating:1A Max.  
 Withstanding Voltage:500V AC For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Temperature Range:-55°C~+105°C  
 RoHS Compliant

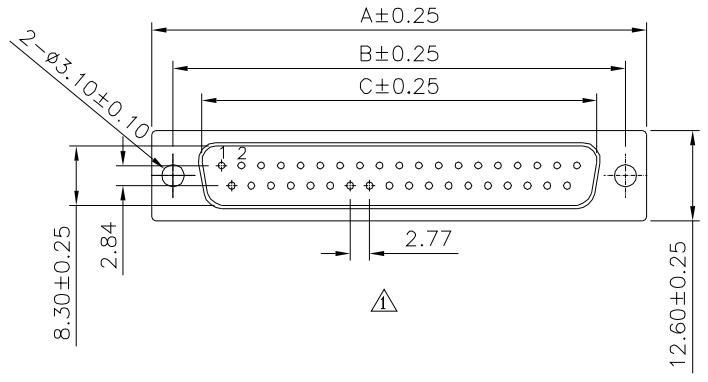

Pin	A	B	C
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

④	Back-Shell	Steel	1	Tin Plated Over Copper
③	Front-Shell	Steel	1	Nickel Plated Over Copper
②	Contact	Brass	9~37	Gold Flash Over All,Over Nickel
①	Housing	PBT,UL94V-0	2	Blue
No.	Part Name	Material	Q'ty	Finish

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 .XXX ±0.10 ANG. ±1°
03212		MEI		
		CHECKED BY	HZF	
SCALE NONE		DRAWING BY	SONG	
		REV.	A2	

NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	12/12/2023
△1	A1	Modify Data	HZF	04/19/2022
△0	A0	NEW RELEASE	HZF	05/27/2013