
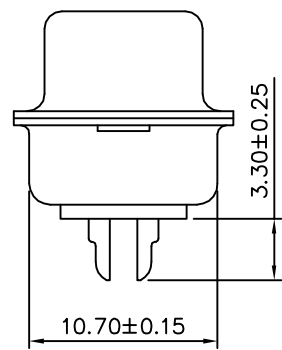
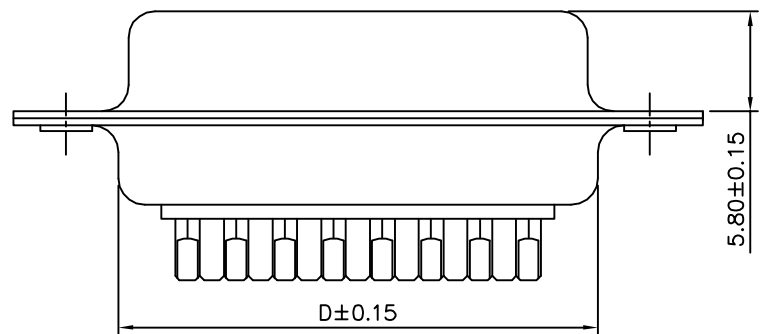


SPECIFICATION

Current Rating:1 Amps
 Withstanding Voltage:500V(One Minute)
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At DC 500V
 Operating Temperature:-40°C~+85°C
 Insulator:PBT+30%G.F.(UL94V-0),Blue
 Contact:Brass,Gold Flash On Contact Area
 Tin Plated On Solder Tails,Over Nickel
 Shell:SPCC,Nickel Plated Front,Tin Plated Rear
 RoHS Compliant

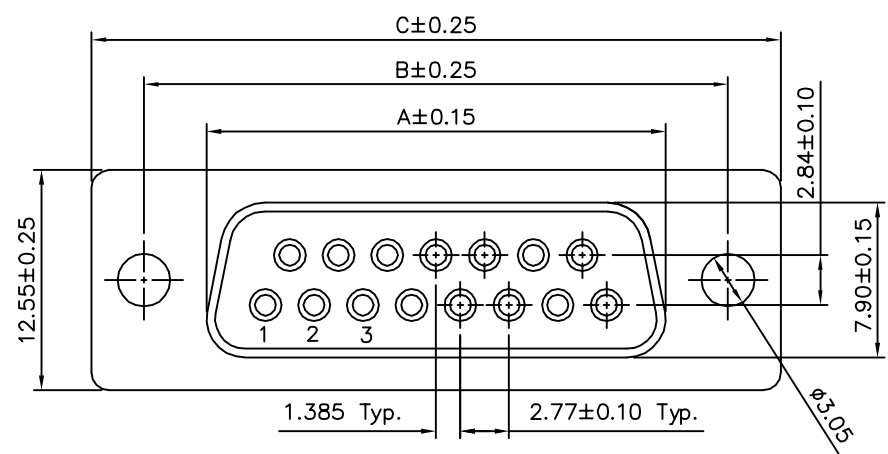

Pin	A	B	C	D
09	16.33	24.99	30.81	19.20
15	24.80	33.32	39.20	27.70
25	38.38	47.04	53.04	41.10
37	54.84	63.50	69.40	57.30

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X* ±3° .XX ±0.25 .XX* ±1° .XXX ±0.05 .XXX* ±0.5°
03287		MEI		
		CHECKED BY		
		HZF		
		DRAWING BY		
		CYP		
SCALE	NONE	REV.	BO	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ BO		NEW RELEASE	HZF	09/27/2015