
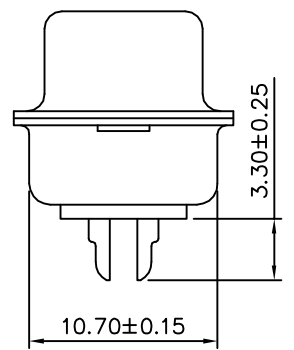
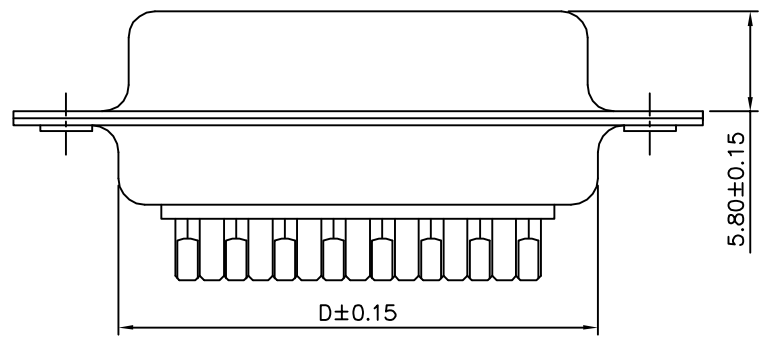


**SPECIFICATION**

Current Rating:1 Amps  
 Withstanding Voltage:500V(One Minute)  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 At DC 500V  
 Operating Temperature:-40°C~+85°C  
 Insulator:PBT+30%G.F.(UL94V-0),Blue  
 Contact:Brass,Gold Flash On Contact Area  
 Tin Plated On Solder Tails,Over Nickel  
 Shell:SPCC,Nickel Plated Front,Tin Plated Rear  
 RoHS Compliant

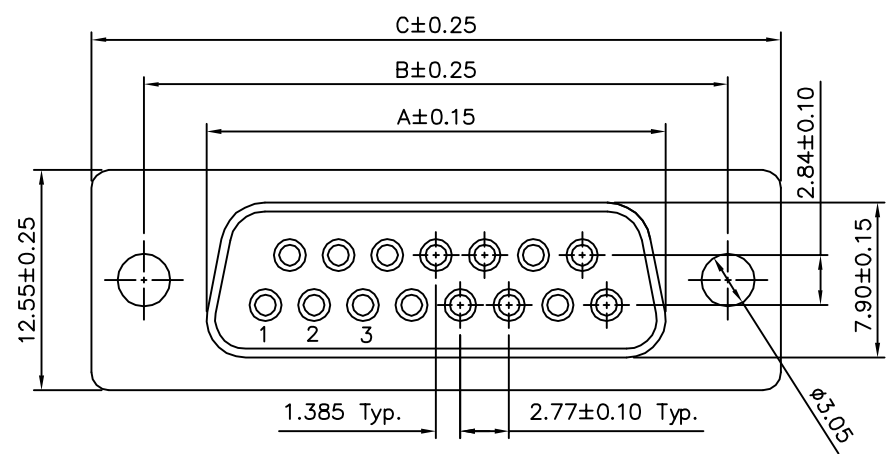

Pin	A	B	C	D
09	16.33	24.99	30.81	19.20
15	24.80	33.32	39.20	27.70
25	38.38	47.04	53.04	41.10
37	54.84	63.50	69.40	57.30

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X* ±3* .XX ±0.25 .XX* ±1* .XXX ±0.05 .XXX* ±0.5*
03304		MEI		
		CHECKED BY HZF		
		DRAWING BY CYP		UNIT
SCALE	NONE	REV.	BO	mm

NO.	REV.	REVISIONS	CHK	DATE
△ BO		NEW RELEASE	HZF	09/27/2015