

△ SPECIFICATION

Current Rating:1A Max.

Withstand Voltage:500V AC For 1 Minute


Contact Resistance:30 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.
At DC 500V



Temperature Range:-55°C~+105°C

Pin	Mating Force	Unmating Force
09	5.5 Kgf Max.	1.7 Kgf Min.
15	6.5 Kgf Max.	1.9 Kgf Min.
25	7.5 Kgf Max.	2.7 Kgf Min.
37	9.0 Kgf Max.	3.2 Kgf Min.

RoHS Compliant

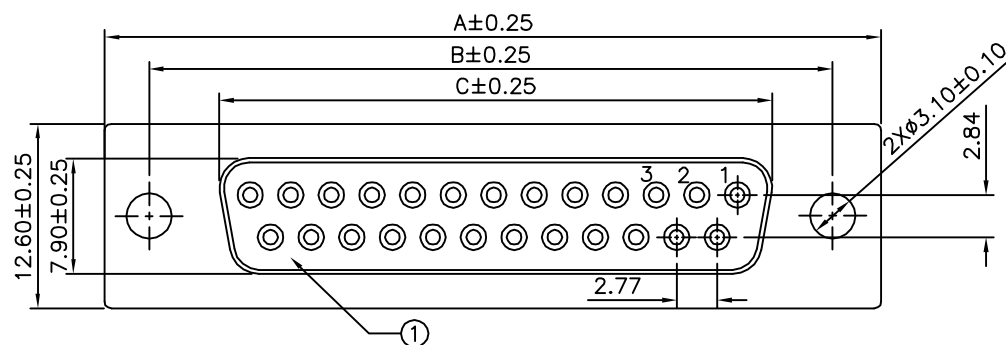

△

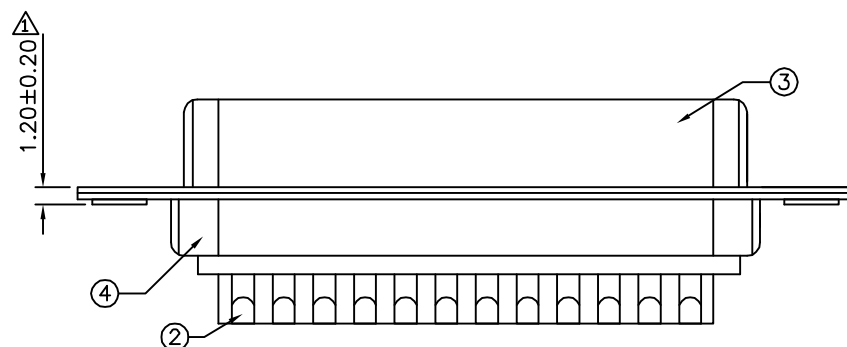

△

Pin	A	B	C
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.38
37	69.40	63.50	54.80

△

④	Back-Shell	Cold Rolled Steel	1	Tin Plated Over Copper
③	Front-Shell	Cold Rolled Steel	1	Nickel Plated Over Copper
②	Contact	Brass	—	Gold Flash Over All,Over Nickel
①	Housing	PBT	2	UL94V-0,Blue
No.	Name	Material	Q'ty	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03317

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY


HZF

DRAWING BY

GAO

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE△.X ±0.30
△.XX ±0.20
△.XXX ±0.10
ANG. ±1°UNIT
mm

△ A1

Modify Data

HZF

08/19/2013

△ A0

NEW RELEASE

SHIN

03/11/2007

NO. REV.

REVISIONS

CHK

DATE