
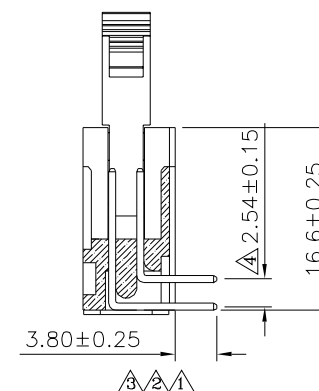


△ SPECIFICATION
 Current Rating: 3 Amps
 Withstand Voltage: 1000V AC
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C ~ +105°C
 Insulator: PBT (UL94V-0), Black
 Contact: Brass, Gold Flash Over Nickel
 Only 60P ~ 64P With Slot "A"
 Less Than 18 Pin Without Slot "B"
 RoHS Compliant

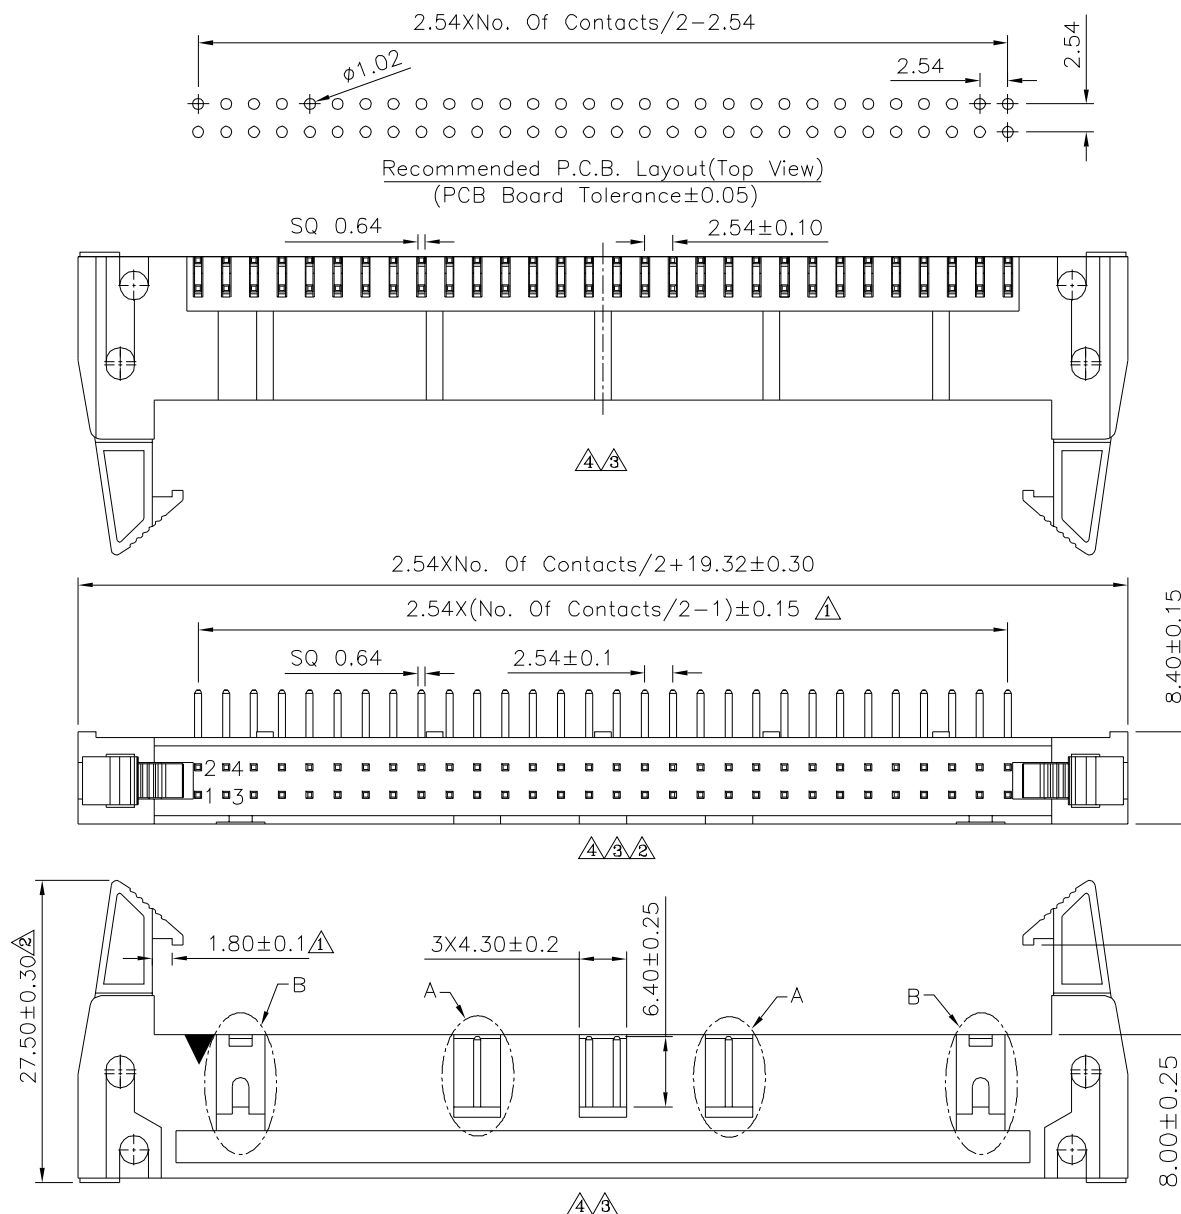

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

03870

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP

REV. A4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△ X. ± 0.25 X.* $\pm 2^*$
 △ .X ± 0.20 .X.* $\pm 1.5^*$
 △ .XX ± 0.15 .XX.* $\pm 1^*$
 △ .XXX ± 0.10 .XXX.* $\pm 0.5^*$

UNIT
 mm



△ A4

Modify Data

HZF 05/29/2015

△ A3

Modify Data

HZF 04/22/2015

△ A2

Modify Data

HZF 03/06/2014

△ A1

Modify Data

HZF 01/11/2013

△ A0

NEW RELEASE

HZF 09/15/2010

NO. REV.

REVISIONS

CHK DATE