

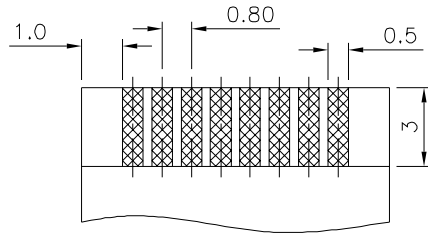


**△ SPECIFICATION**  
**1.General Characteristics**  
 0.8mm FPC XXP SMT 90° ZIF Bottom Contact  
**2.Material&Finish**  
 △ Latch:PA46(UL94V-0),Black  
 △ Housing:LCP(UL94V-0),Nature  
 Contact:Phosphor Bronze,Tin Plated Over Nickel  
**△3.Electrical Characteristics**  
 Current Rating:0.5 Amp AC/DC  
 Voltage Rating:50V AC/DC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:500 Megaohms Min. @500V DC  
**4.Environmental Characteristics**  
 Operation Temperature:-40°C~+105°C  
**5.RoHS Compliant**

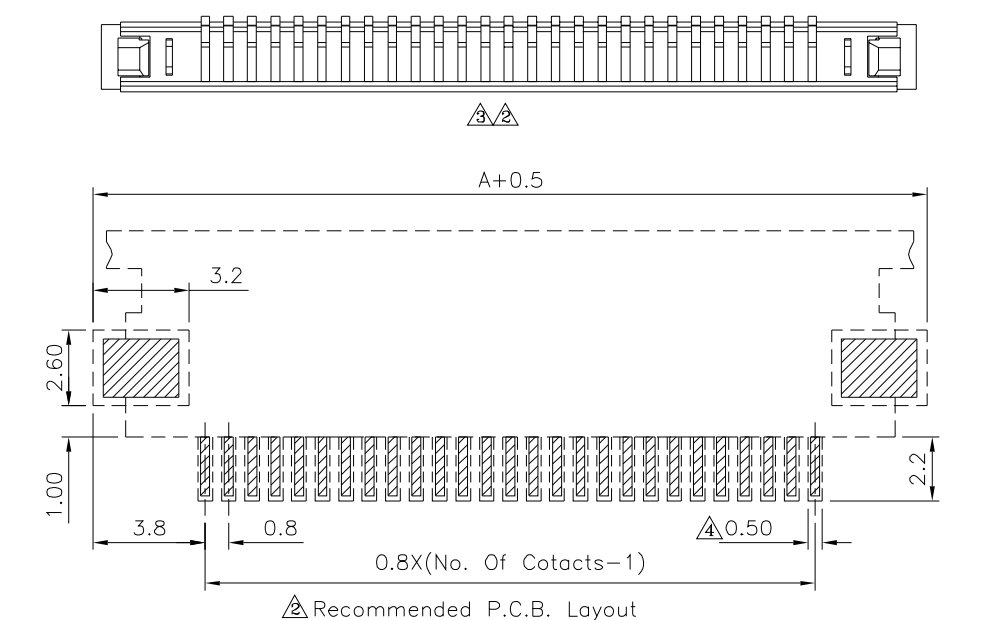

△ FPC/FPC Dimension  
 Thickness:0.300<sup>+0.05</sup>/<sub>0.03</sub>mm

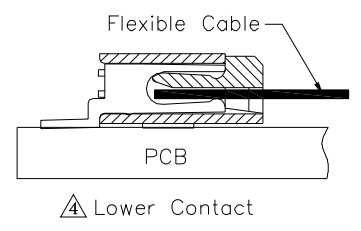

△△△

Pin	A	B	Pin	A	B
04	9.50	8.20	19	21.50	20.20
05	10.30	9.00	20	22.30	21.00
06	11.10	9.80	*21	23.10	21.80
07	11.90	10.60	*22	23.90	22.60
*08	12.70	11.40	*23	24.70	23.40
*09	13.50	12.20	24	25.50	24.20
*10	14.30	13.00	*25	26.30	25.00
11	15.10	13.80	*26	27.10	25.80
*12	15.90	14.60	*27	27.90	26.60
13	16.70	15.40	*28	28.70	27.40
*14	17.50	16.20	29	29.50	28.20
15	18.30	17.00	*30	30.30	29.00
16	19.10	17.80	31	31.10	29.80
17	19.90	18.60	32	31.90	30.60
*18	20.70	19.40			

The Mark Of "\*" Are Toolled Already

**4U CON** 元化興業股份有限公司  
 4U CON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.25 △ .XX ±0.20 △ .XXX ±0.10 ANG. ±2°	△ B4	Modify Data	HZF	05/05/2015
04053		MEI			△ B3	Modify Data	HZF	04/15/2015
		CHECKED BY			△ B2	Modify Data	HZF	02/21/2013
SCALE		REV.		UNIT	△ B1	Modify Data	HZF	07/29/2011
NONE		B4		mm	△ B0	NEW RELEASE	HZF	05/16/2009
					NO.REV.	REVISIONS	CHK	DATE