

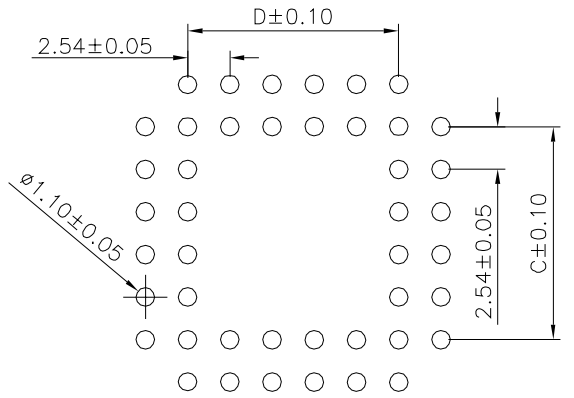


SPECIFICATION
 Current Rating:1.0A AC/DC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:500V AC/Minute
 Temperature Range:-50°C~+105°C
 Insulator:PPS(UL94V-0),Brown
 Bottom Cover:PBT(UL94V-0),Brown
 Contact:Phosphor Bronze,Tin Plated
 RoHS Compliant

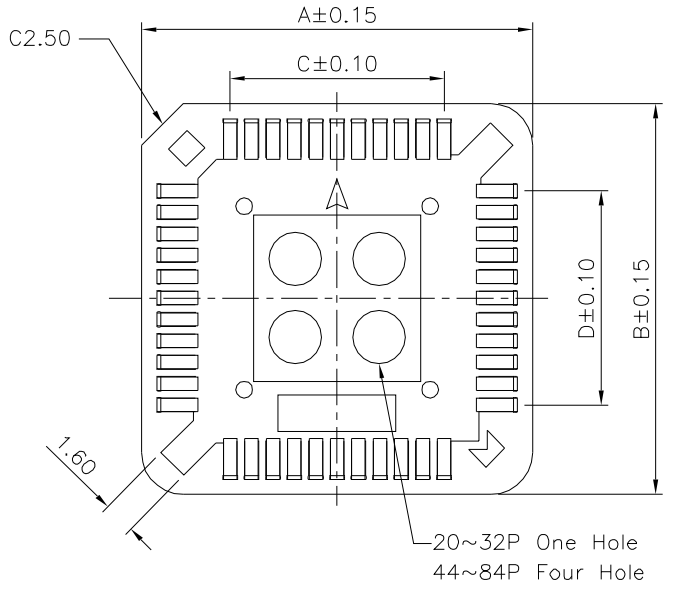

Recommended P.C.B. Layout

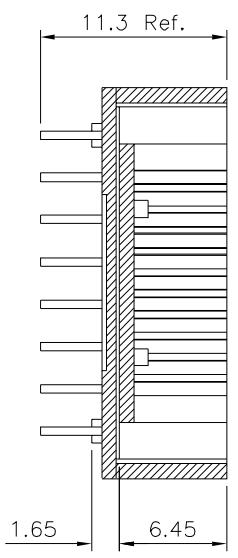

20~32P One Hole
 44~84P Four Hole

Contact	A	B	C	D
20	15.50	15.50	5.08	5.08
28	18.04	18.04	7.62	7.62
32	18.04	20.60	7.62	10.16
44	23.48	23.48	12.70	12.70
52	25.88	25.88	15.24	15.24
68	31.04	31.04	20.32	20.32
84	36.04	36.04	25.40	25.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 ANG.
04712		MEI		
		CHECKED BY HZF		
DRAWING BY LZX		REV. A0		UNIT mm
SCALE	NONE	REV.	A0	NO. REV.

△ A0	NEW RELEASE	HZF	07/22/2023
NO. REV.	REVISIONS	CHK	DATE