




△ Recommended P.C.B. Layout

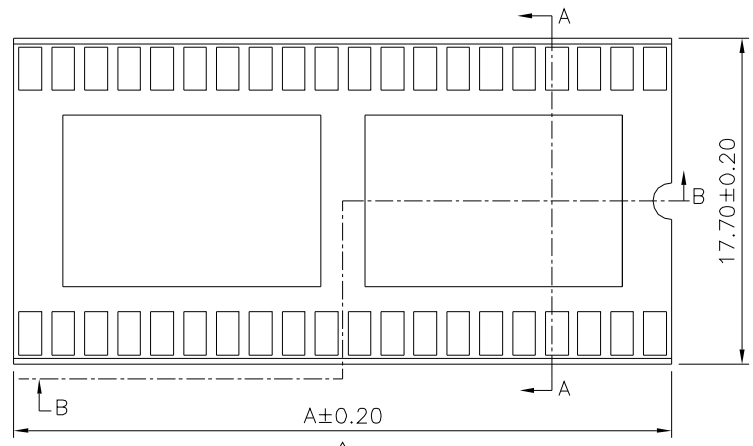

△

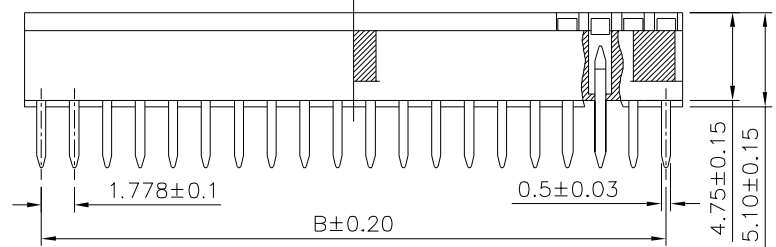

△ Section B-B

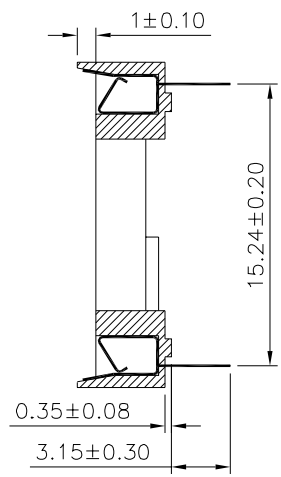

△ Section A-A

△ SPECIFICATION

Current Rating:1A  
 Dielectric Withstanding Voltage:1000V RMS/Minute  
 Insulator Resistance:5000 Megaohms Min.  
 Operating Temperature:-55°C To 85°C  
 Contact Resistance:20 Milliohms initial.  
 30 Milliohms After Test.  
 Contact:Phosphor Bronze,Tin Plated Over Nickel  
 Insulator:PBT(UL94V-0)  
 RoHS Compliant

Pin	A	B
40	35.56	33.78
42	37.34	35.56
48	42.67	40.89
52	46.23	44.45
54	48.01	46.23
56	49.78	48.01
58	51.56	49.78
60	53.34	51.56
62	55.12	53.34
64	56.90	55.12

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
04750		MEI		
		CHECKED BY	HZF	
SCALE	NONE	DRAWING BY	CYP	
		REV.	A2	UNIT mm

△ A2	Modify Data	HZF	02/07/2017
△ A1	Modify Data	SHIN	08/31/2006
△ A0	NEW RELEASE	BECKY	07/19/2004
NO. REV.	REVISIONS	CHK	DATE